


# TL750L, TL751L SERIES LOW-DROPOUT VOLTAGE REGULATORS

SLVS017R – SEPTEMBER 1987 – REVISED AUGUST 2003


- Very Low Dropout Voltage, Less Than 0.6 V at 150 mA
- Very Low Quiescent Current
- TTL- and CMOS-Compatible Enable on TL751L Series
- 60-V Load-Dump Protection
- Reverse Transient Protection Down To -50 V
- Internal Thermal-Overload Protection
- Overvoltage Protection
- Internal Overcurrent-Limiting Circuitry
- Less Than 500- $\mu$ A Disable (TL751L Series)

TL750L...D PACKAGE  
(TOP VIEW)

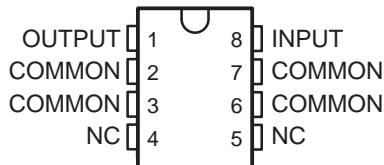


NC – No internal connection


TL750L...KC PACKAGE  
(TOP VIEW)

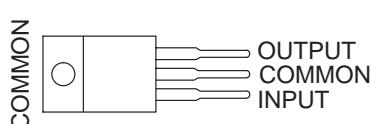


TL750L...KTE PACKAGE  
(TOP VIEW)

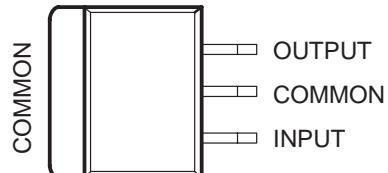

TL750L...LP PACKAGE  
(TO-92, TO-226AA)  
(TOP VIEW)




TL750L...P PACKAGE  
(TOP VIEW)

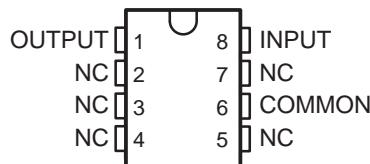


NC – No internal connection

TL751L...D PACKAGE  
(TOP VIEW)

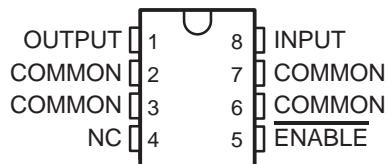

NC – No internal connection

TL751L...P PACKAGE  
(TOP VIEW)

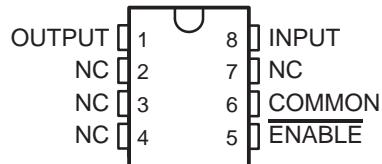

NC – No internal connection

## description/ordering information

The TL750L and TL751L series of fixed-output voltage regulators offer 5-V, 8-V, 10-V, and 12-V options. The TL751L series also has an enable (ENABLE) input. When ENABLE is high, the regulator output is placed in the high-impedance state. This gives the designer complete control over power up, power down, or emergency shutdown.

The TL750L and TL751L series are low-dropout positive-voltage regulators specifically designed for battery-powered systems. These devices incorporate overvoltage and current-limiting protection circuitry, along with internal reverse-battery protection circuitry to protect the devices and the regulated system. The series is fully protected against 60-V load-dump and reverse-battery conditions. Extremely low quiescent current during full-load conditions makes these devices ideal for standby power systems.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2003, Texas Instruments Incorporated

 **TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# TL750L, TL751L SERIES LOW-DROPOUT VOLTAGE REGULATORS

SLVS017R – SEPTEMBER 1987 – REVISED AUGUST 2003

## description/ordering information (continued)

### ORDERING INFORMATION

T <sub>J</sub>	V <sub>O</sub> TYP AT 25°C	PACKAGE <sup>†</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING
0°C to 125°C	5 V	POWER-FLEX (KTE)	Reel of 2000	TL750L05CKTER
		SOIC (D)	Tube of 75	TL750L05CD
			Reel of 2500	TL750L05CDR
		TO-226 / TO-92 (LP)	Tube of 75	TL751L05CD
			Reel of 2500	TL751L05CDR
	8 V	TO-220 (KC)	Bulk of 1000	TL750L05CLP
		SOIC (D)	Reel of 2000	TL750L05CLPR
		TO-226 / TO-92 (LP)	Tube of 50	TL750L05CKC
	10 V	PDIP (P)	Tube of 75	TL750L08CD
		SOIC (D)	Reel of 2500	TL750L08CDR
		TO-226 / TO-92 (LP)	Bulk of 1000	TL750L08CLP
		PDIP (P)	Tube of 50	TL751L10CP
		SOIC (D)	Tube of 75	TL750L10CD
	12 V	TO-226 / TO-92 (LP)	Reel of 2500	TL750L10CDR
		PDIP (P)	Tube of 75	TL751L10CD
		SOIC (D)	Reel of 2500	TL751L10CDR
		TO-226 / TO-92 (LP)	Bulk of 1000	TL750L10CLP
		PDIP (P)	Tube of 75	TL750L12CD
	12 V	SOIC (D)	Reel of 2500	TL750L12CDR
		TO-226 / TO-92 (LP)	Tube of 75	TL751L12CD
		SOIC (D)	Reel of 2500	TL751L12CDR
		TO-226 / TO-92 (LP)	Bulk of 1000	TL750L12CLP

<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).

DEVICE COMPONENT COUNT	
Transistors	20
JFETs	2
Diodes	5
Resistors	16



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# TL750L, TL751L SERIES LOW-DROPOUT VOLTAGE REGULATORS

SLVS017R – SEPTEMBER 1987 – REVISED AUGUST 2003

## absolute maximum ratings over operating junction temperature range (unless otherwise noted)†

Continuous input voltage .....	26 V
Transient input voltage, $T_A = 25^\circ\text{C}$ (see Note 1) .....	60 V
Continuous reverse input voltage .....	-15 V
Transient reverse input voltage, $t \leq 100 \text{ ms}$ .....	-50 V
Operating virtual junction temperature, $T_J$ .....	150°C
Lead temperature 1.6 mm (1/16 inch) for 10 seconds .....	260 °C
Storage temperature range, $T_{\text{stg}}$ .....	-65°C to 150°C

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The transient input voltage rating applies to the waveform shown in Figure 1.

## package thermal data (see Note 2)

PACKAGE	BOARD	$\theta_{JC}$	$\theta_{JA}$
PDIP (P)	High K, JESD 51-7	57°C/W	85°C/W
POWER-FLEX (KTE)	High K, JESD 51-5	3°C/W	23°C/W
SOIC (D)	High K, JESD 51-7	39°C/W	97°C/W
TO-226 / TO-92 (LP)	High K, JESD 51-7	55°C/W	140°C/W
TO-220 (KC)	High K, JESD 51-5	3°C/W	19°C/W

NOTE 2: Maximum power dissipation is a function of  $T_J(\text{max})$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = (T_J(\text{max}) - T_A)/\theta_{JA}$ . Operating at the absolute maximum  $T_J$  of 150°C can affect reliability.

## recommended operating conditions over recommended operating junction temperature range (unless otherwise noted)

			MIN	MAX	UNITS
$V_I$ Input voltage		TL75xL05	6	26	V
		TL75xL08	9	26	
		TL75xL10	11	26	
		TL75xL12	13	26	
$V_{IH}$	High-level ENABLE input voltage	TL751Lxx	2	15	V
$V_{IL}^{\dagger}$ Low-level ENABLE input voltage	$T_J = 25^\circ\text{C}$	TL751Lxx	-0.3	0.8	V
	$T_J = 0^\circ\text{C}$ to $125^\circ\text{C}$	TL751Lxx	-0.15	0.8	
$I_O$	Output current range	TL75xLxx	0	150	mA
$T_J$	Operating virtual junction temperature	TL75xLxxC	0	125	°C

† The algebraic convention, in which the least positive (most negative) value is designated minimum, is used in this data sheet for ENABLE voltage levels and temperature only.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# TL750L, TL751L SERIES LOW-DROPOUT VOLTAGE REGULATORS

SLVS017R – SEPTEMBER 1987 – REVISED AUGUST 2003

## electrical characteristics, $V_I = 14 \text{ V}$ , $I_O = 10 \text{ mA}$ , $T_J = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS <sup>†</sup>	TL750L05 TL751L05			UNIT
		MIN	TYP	MAX	
Output voltage	$V_I = 6 \text{ V to } 26 \text{ V}$ , $I_O = 0 \text{ to } 150 \text{ mA}$	$T_J = 25^\circ\text{C}$	4.80	5	5.2
		$T_J = 0^\circ\text{C to } 125^\circ\text{C}$	4.75		5.25
Input regulation voltage	$V_I = 9 \text{ V to } 16 \text{ V}$		5	10	mV
	$V_I = 6 \text{ V to } 26 \text{ V}$		6	30	
Ripple rejection	$V_I = 8 \text{ V to } 18 \text{ V}$ , $f = 120 \text{ Hz}$		60	65	dB
Output regulation voltage	$I_O = 5 \text{ mA to } 150 \text{ mA}$		20	50	mV
Dropout voltage	$I_O = 10 \text{ mA}$		0.2		V
	$I_O = 150 \text{ mA}$		0.6		
Output noise voltage	$f = 10 \text{ Hz to } 100 \text{ kHz}$		500		$\mu\text{V}$
Input bias current	$I_O = 150 \text{ mA}$		10	12	mA
	$V_I = 6 \text{ V to } 26 \text{ V}$ , $I_O = 10 \text{ mA}$ , $T_J = 0^\circ\text{C to } 125^\circ\text{C}$		1	2	
	ENABLE > 2 V			0.5	

<sup>†</sup>Pulse-testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately. All characteristics are measured with a 0.1- $\mu\text{F}$  capacitor across the input and a 10- $\mu\text{F}$  capacitor, with equivalent series resistance of less than 0.4  $\Omega$ , across the output.

## electrical characteristics, $V_I = 14 \text{ V}$ , $I_O = 10 \text{ mA}$ , $T_J = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS <sup>†</sup>	TL750L08 TL751L08			UNIT
		MIN	TYP	MAX	
Output voltage	$V_I = 9 \text{ V to } 26 \text{ V}$ , $I_O = 0 \text{ to } 150 \text{ mA}$	$T_J = 25^\circ\text{C}$	7.68	8	8.32
		$T_J = 0^\circ\text{C to } 125^\circ\text{C}$	7.6		8.4
Input regulation voltage	$V_I = 10 \text{ V to } 17 \text{ V}$		10	20	mV
	$V_I = 9 \text{ V to } 26 \text{ V}$		25	50	
Ripple rejection	$V_I = 11 \text{ V to } 21 \text{ V}$ , $f = 120 \text{ Hz}$		60	65	dB
Output regulation voltage	$I_O = 5 \text{ mA to } 150 \text{ mA}$		40	80	mV
Dropout voltage	$I_O = 10 \text{ mA}$		0.2		V
	$I_O = 150 \text{ mA}$		0.6		
Output noise voltage	$f = 10 \text{ Hz to } 100 \text{ kHz}$		500		$\mu\text{V}$
Input bias current	$I_O = 150 \text{ mA}$		10	12	mA
	$V_I = 9 \text{ V to } 26 \text{ V}$ , $I_O = 10 \text{ mA}$ , $T_J = 0^\circ\text{C to } 125^\circ\text{C}$		1	2	
	ENABLE > 2 V			0.5	

<sup>†</sup>Pulse-testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately. All characteristics are measured with a 0.1- $\mu\text{F}$  capacitor across the input and a 10- $\mu\text{F}$  capacitor, with equivalent series resistance of less than 0.4  $\Omega$ , across the output.



# TL750L, TL751L SERIES LOW-DROPOUT VOLTAGE REGULATORS

SLVS017R – SEPTEMBER 1987 – REVISED AUGUST 2003

**electrical characteristics,  $V_I = 14 \text{ V}$ ,  $I_O = 10 \text{ mA}$ ,  $T_J = 25^\circ\text{C}$  (unless otherwise noted)**

PARAMETER	TEST CONDITIONS <sup>†</sup>	TL750L10 TL751L10			UNIT
		MIN	TYP	MAX	
Output voltage	$V_I = 11 \text{ V}$ to $26 \text{ V}$ , $I_O = 0$ to $150 \text{ mA}$	$T_J = 25^\circ\text{C}$	9.6	10	10.4
		$T_J = 0^\circ\text{C}$ to $125^\circ\text{C}$	9.5		10.5
Input regulation voltage	$V_I = 12 \text{ V}$ to $19 \text{ V}$		10	25	mV
	$V_I = 11 \text{ V}$ to $26 \text{ V}$		30	60	
Ripple rejection	$V_I = 12 \text{ V}$ to $22 \text{ V}$ , $f = 120 \text{ Hz}$		60	65	dB
Output regulation voltage	$I_O = 5 \text{ mA}$ to $150 \text{ mA}$		50	100	mV
Dropout voltage	$I_O = 10 \text{ mA}$		0.2		V
	$I_O = 150 \text{ mA}$		0.6		
Output noise voltage	$f = 10 \text{ Hz}$ to $100 \text{ kHz}$		700		$\mu\text{V}$
Input bias current	$I_O = 150 \text{ mA}$		10	12	mA
	$V_I = 11 \text{ V}$ to $26 \text{ V}$ , $I_O = 10 \text{ mA}$ , $T_J = 0^\circ\text{C}$ to $125^\circ\text{C}$		1	2	
	ENABLE > 2 V			0.5	

<sup>†</sup>Pulse-testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately. All characteristics are measured with a  $0.1\text{-}\mu\text{F}$  capacitor across the input and a  $10\text{-}\mu\text{F}$  capacitor, with equivalent series resistance of less than  $0.4 \Omega$ , across the output.

**electrical characteristics,  $V_I = 14 \text{ V}$ ,  $I_O = 10 \text{ mA}$ ,  $T_J = 25^\circ\text{C}$  (unless otherwise noted)**

PARAMETER	TEST CONDITIONS <sup>†</sup>	TL750L12 TL751L12			UNIT
		MIN	TYP	MAX	
Output voltage	$V_I = 13 \text{ V}$ to $26 \text{ V}$ , $I_O = 0$ to $150 \text{ mA}$	$T_J = 25^\circ\text{C}$	11.52	12	12.48
		$T_J = 0^\circ\text{C}$ to $125^\circ\text{C}$	11.4		12.6
Input regulation voltage	$V_I = 14 \text{ V}$ to $19 \text{ V}$		15	30	mV
	$V_I = 13 \text{ V}$ to $26 \text{ V}$		20	40	
Ripple rejection	$V_I = 13 \text{ V}$ to $23 \text{ V}$ , $f = 120 \text{ Hz}$		50	55	dB
Output regulation voltage	$I_O = 5 \text{ mA}$ to $150 \text{ mA}$		50	120	mV
Dropout voltage	$I_O = 10 \text{ mA}$		0.2		V
	$I_O = 150 \text{ mA}$		0.6		
Output noise voltage	$f = 10 \text{ Hz}$ to $100 \text{ kHz}$		700		$\mu\text{V}$
Input bias current	$I_O = 150 \text{ mA}$		10	12	mA
	$V_I = 13 \text{ V}$ to $26 \text{ V}$ , $I_O = 10 \text{ mA}$ , $T_J = 0^\circ\text{C}$ to $125^\circ\text{C}$		1	2	
	ENABLE > 2 V			0.5	

<sup>†</sup>Pulse-testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately. All characteristics are measured with a  $0.1\text{-}\mu\text{F}$  capacitor across the input and a  $10\text{-}\mu\text{F}$  capacitor, with equivalent series resistance of less than  $0.4 \Omega$ , across the output.

# TL750L, TL751L SERIES LOW-DROPOUT VOLTAGE REGULATORS

SLVS017R – SEPTEMBER 1987 – REVISED AUGUST 2003

## TYPICAL CHARACTERISTICS

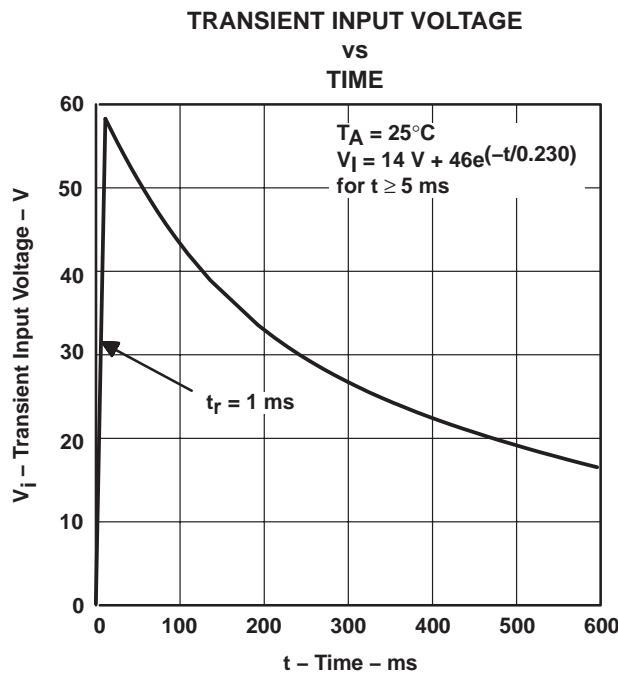


Figure 1

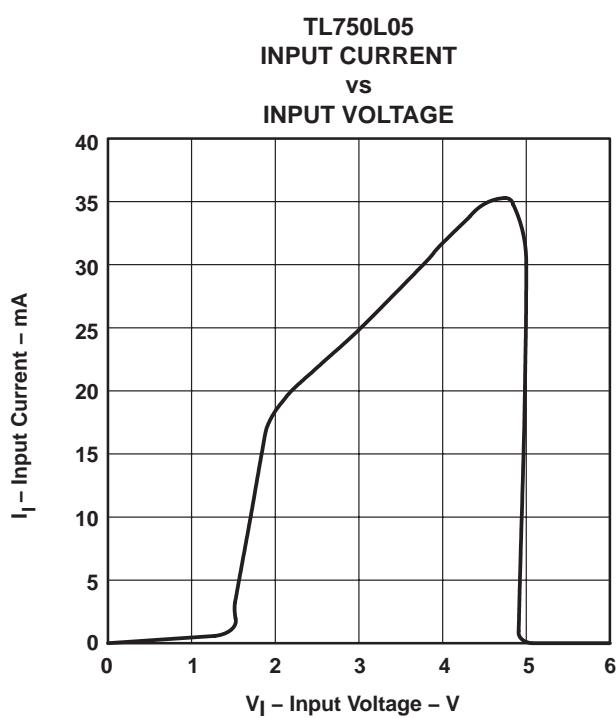


Figure 2

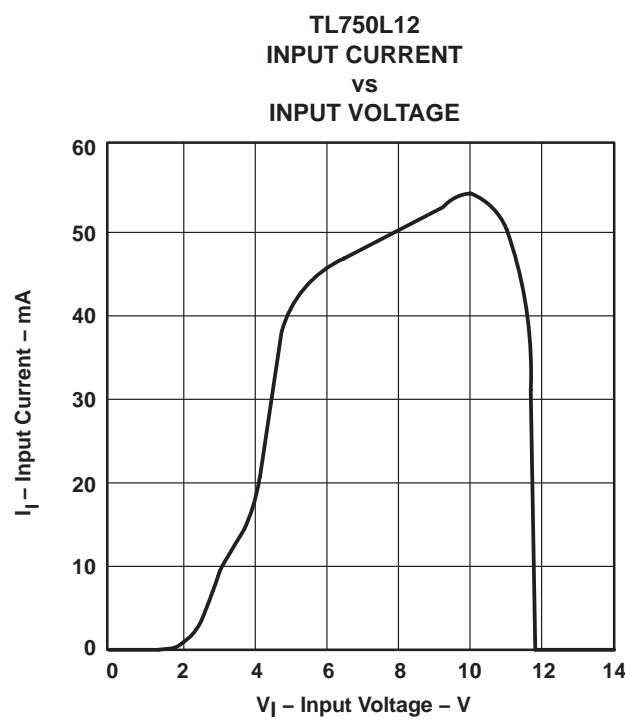


Figure 3

# TL750L, TL751L SERIES LOW-DROPOUT VOLTAGE REGULATORS

SLVS017R – SEPTEMBER 1987 – REVISED AUGUST 2003

## TYPICAL CHARACTERISTICS


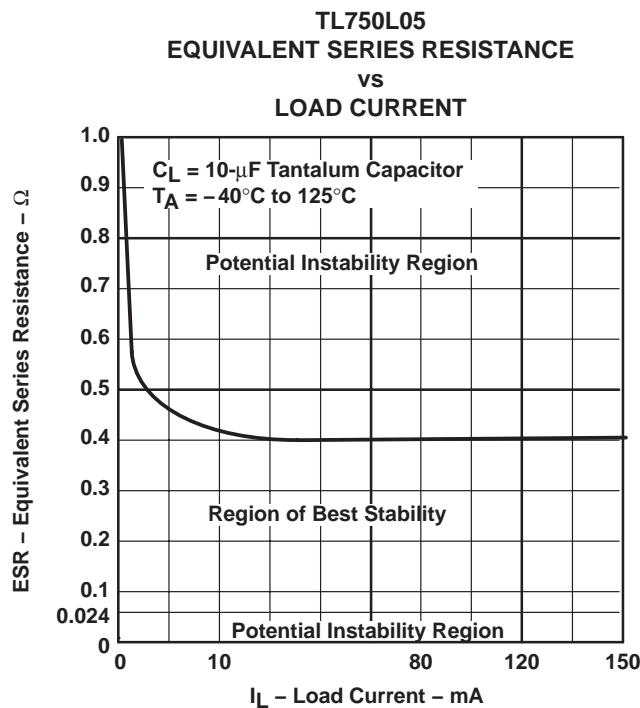


Figure 4

JG (R-GDIP-T8)


CERAMIC DUAL-IN-LINE

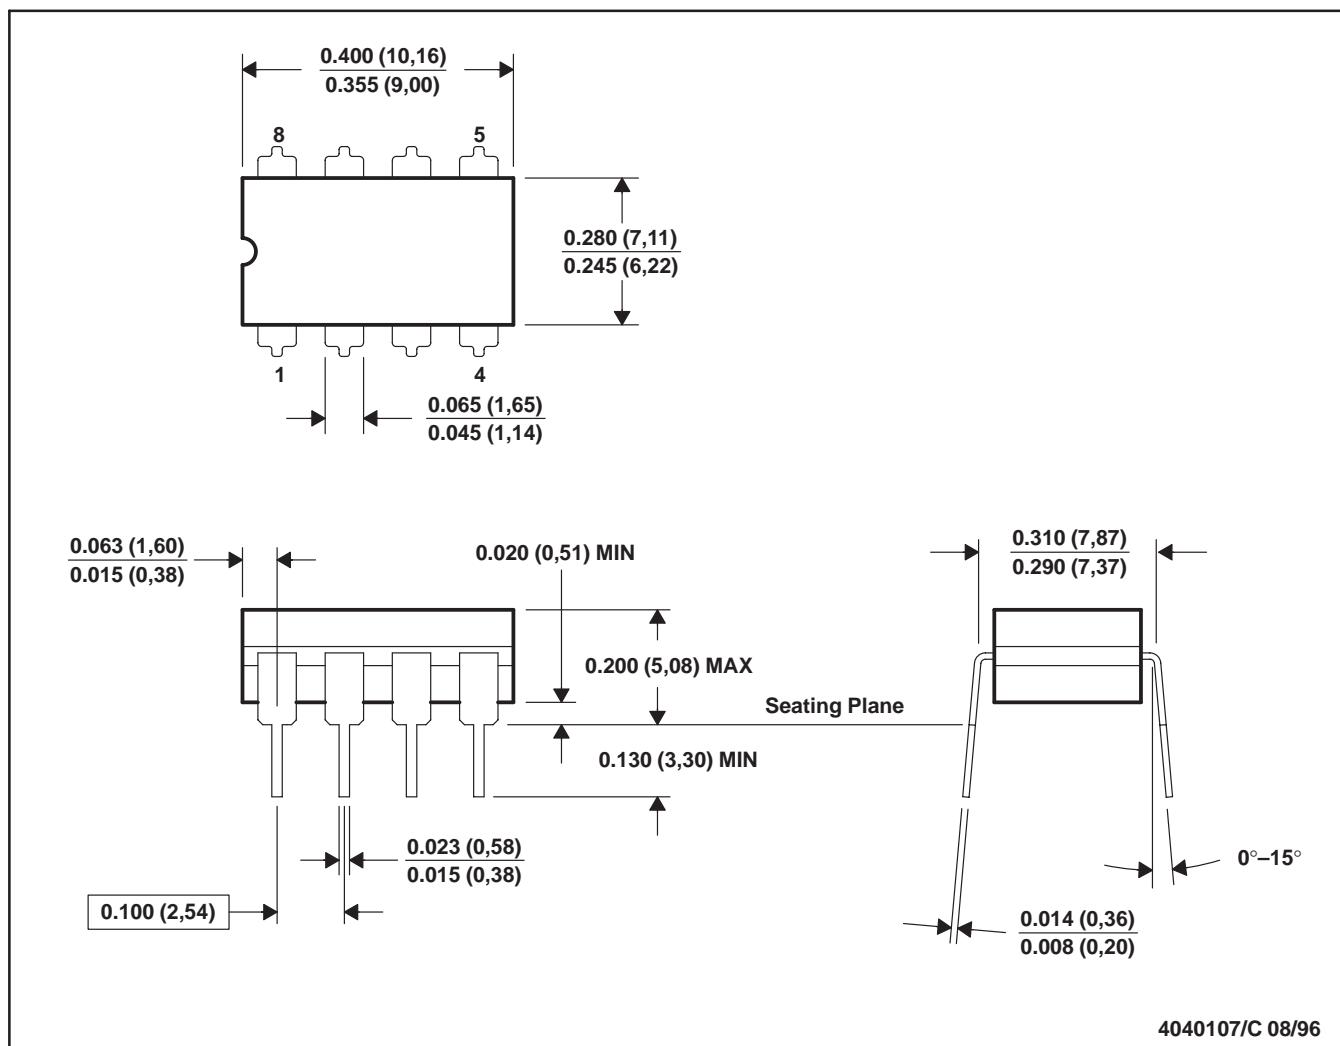

## FK (S-CQCC-N\*\*)

## LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN

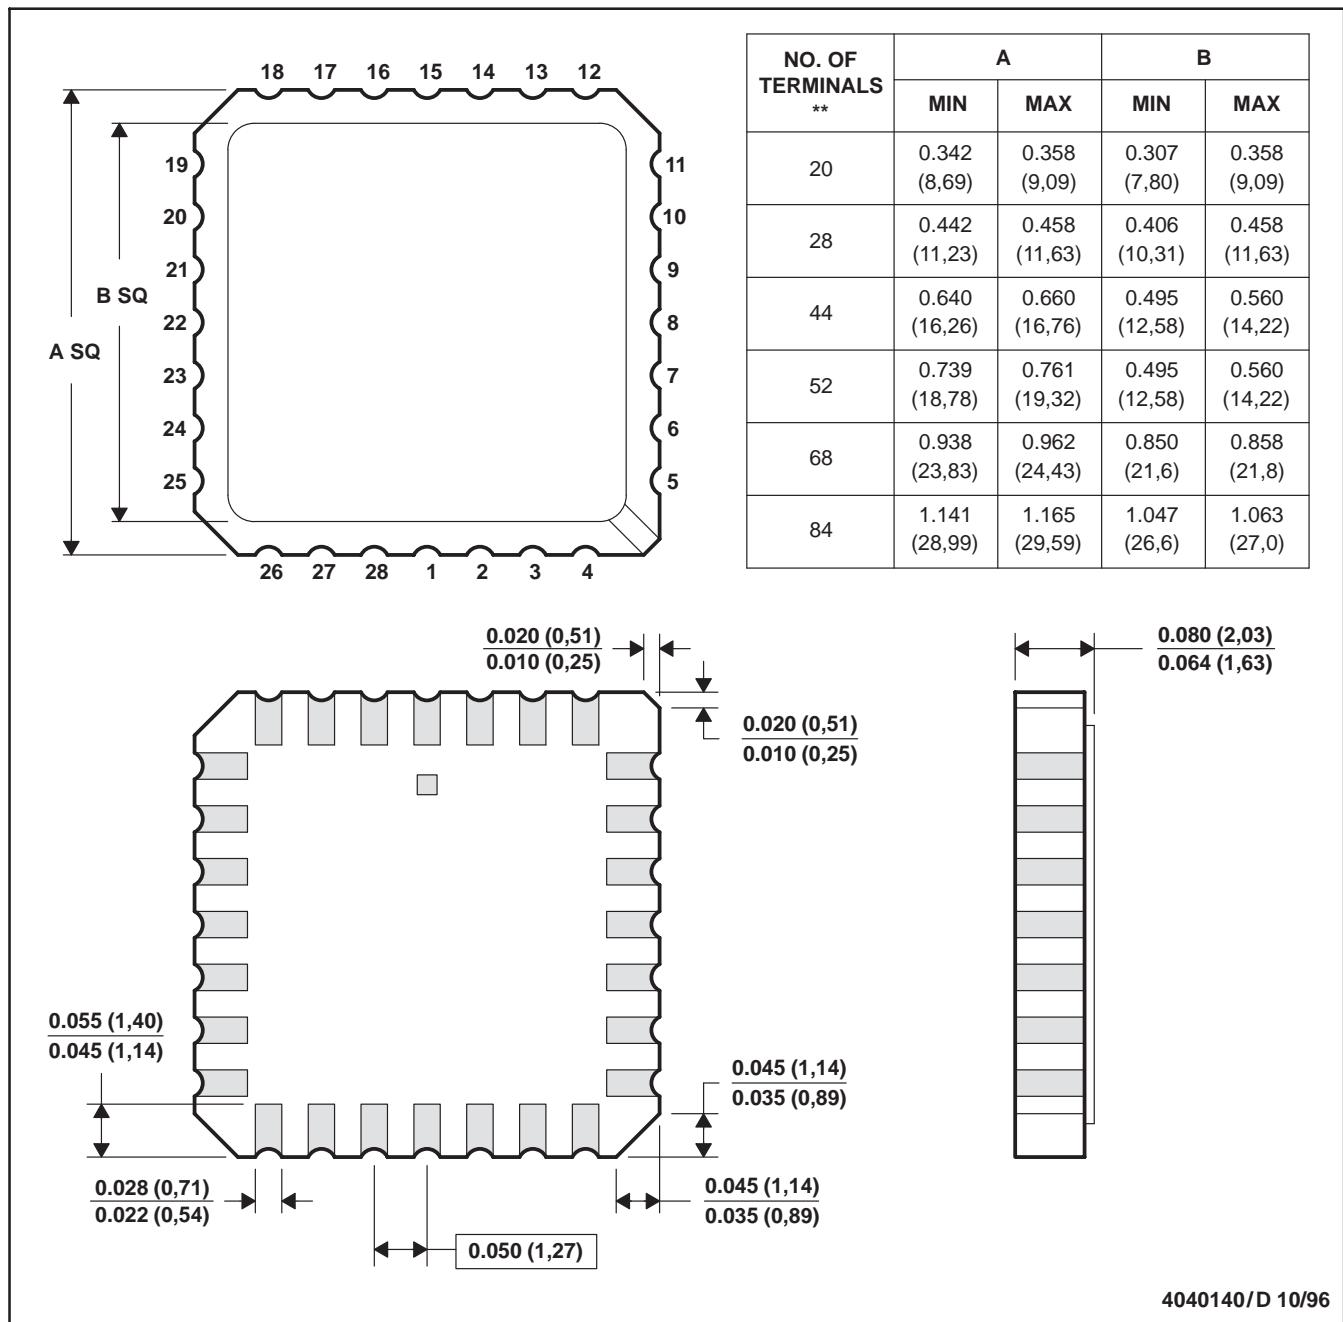

NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.

C. This package can be hermetically sealed with a metal lid.


D. The terminals are gold plated.

E. Falls within JEDEC MS-004

4040140/D 10/96

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE

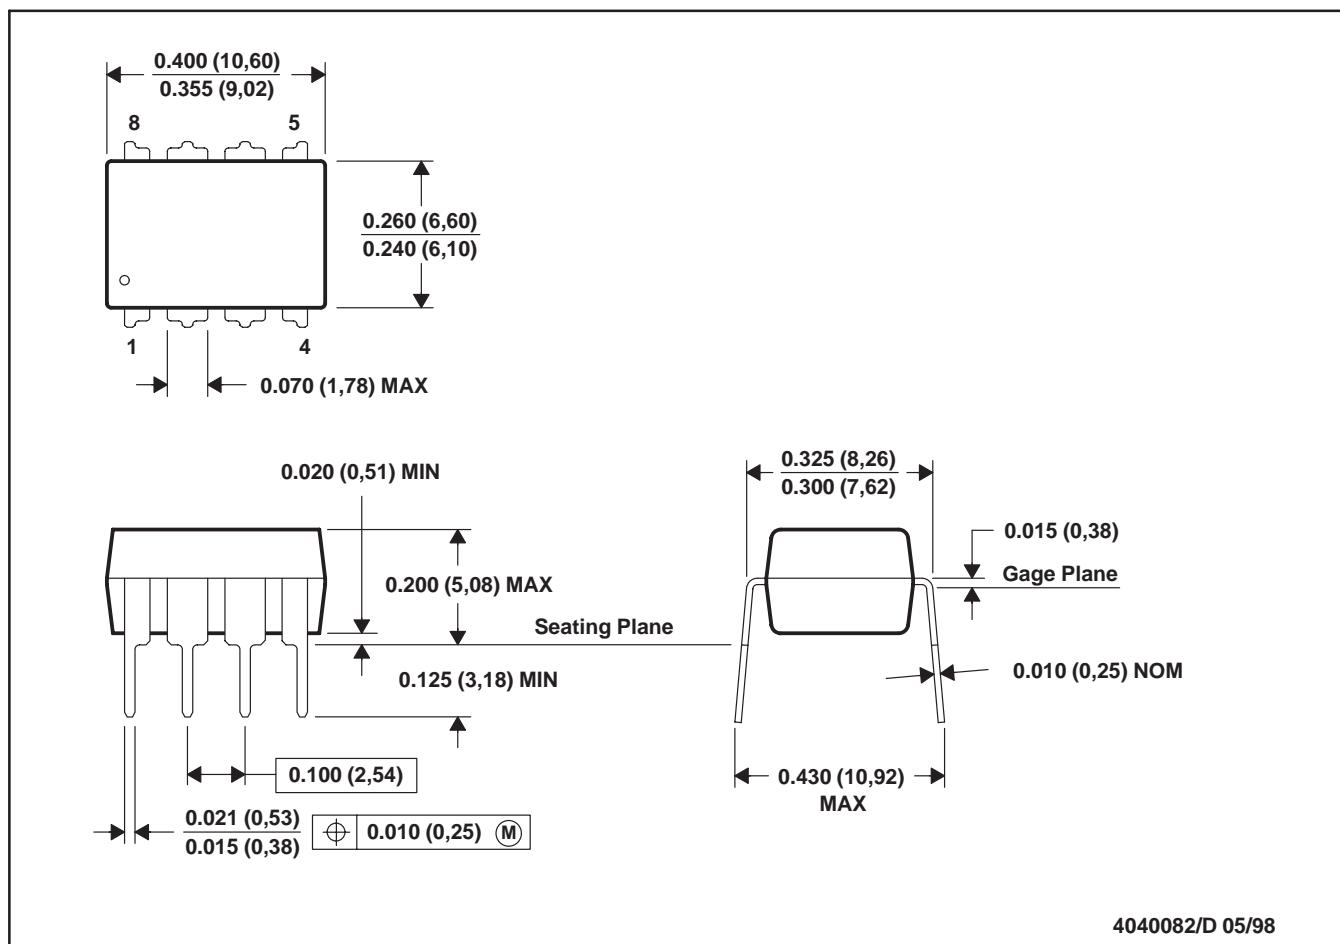


4040082/D 05/98

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - Falls within JEDEC MS-001

For the latest package information, go to [http://www.ti.com/sc/docs/package/pkg\\_info.htm](http://www.ti.com/sc/docs/package/pkg_info.htm)

## KTE (R-PSFM-G3)

## PowerFLEX™ PLASTIC FLANGE-MOUNT

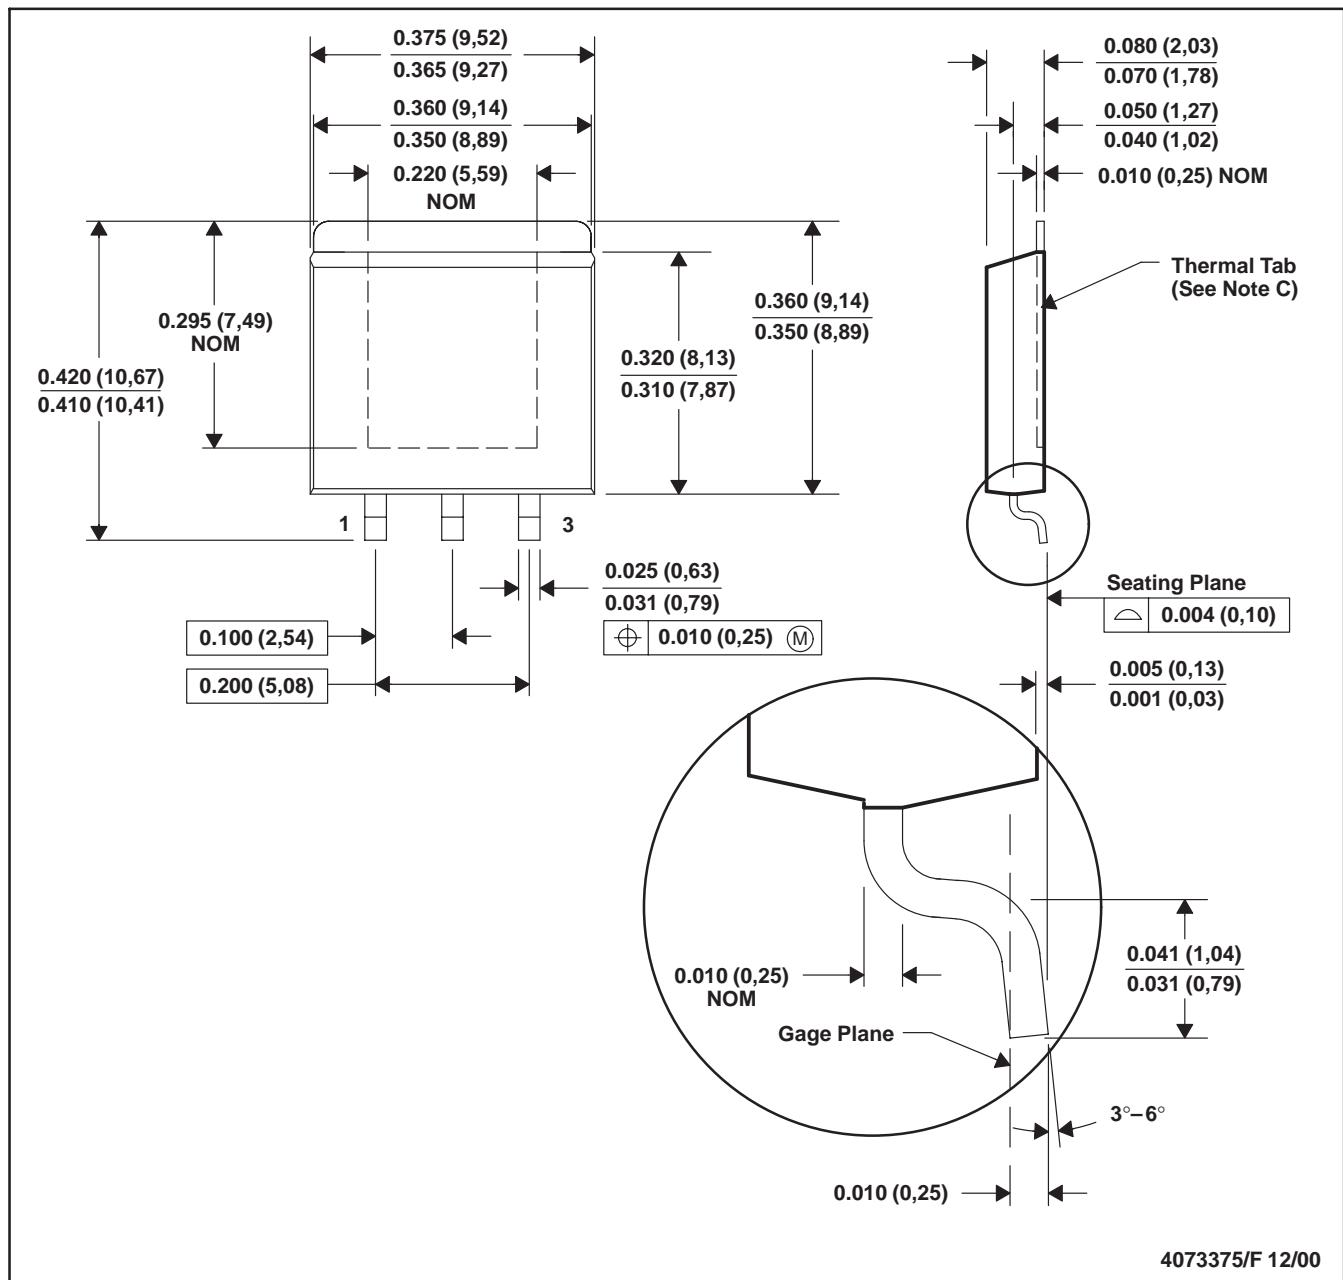


- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. The center lead is in electrical contact with the thermal tab.  
 D. Dimensions do not include mold protrusions, not to exceed 0.006 (0,15).  
 E. Falls within JEDEC MO-169

PowerFLEX is a trademark of Texas Instruments.

## D (R-PDSO-G8)

## PLASTIC SMALL-OUTLINE PACKAGE

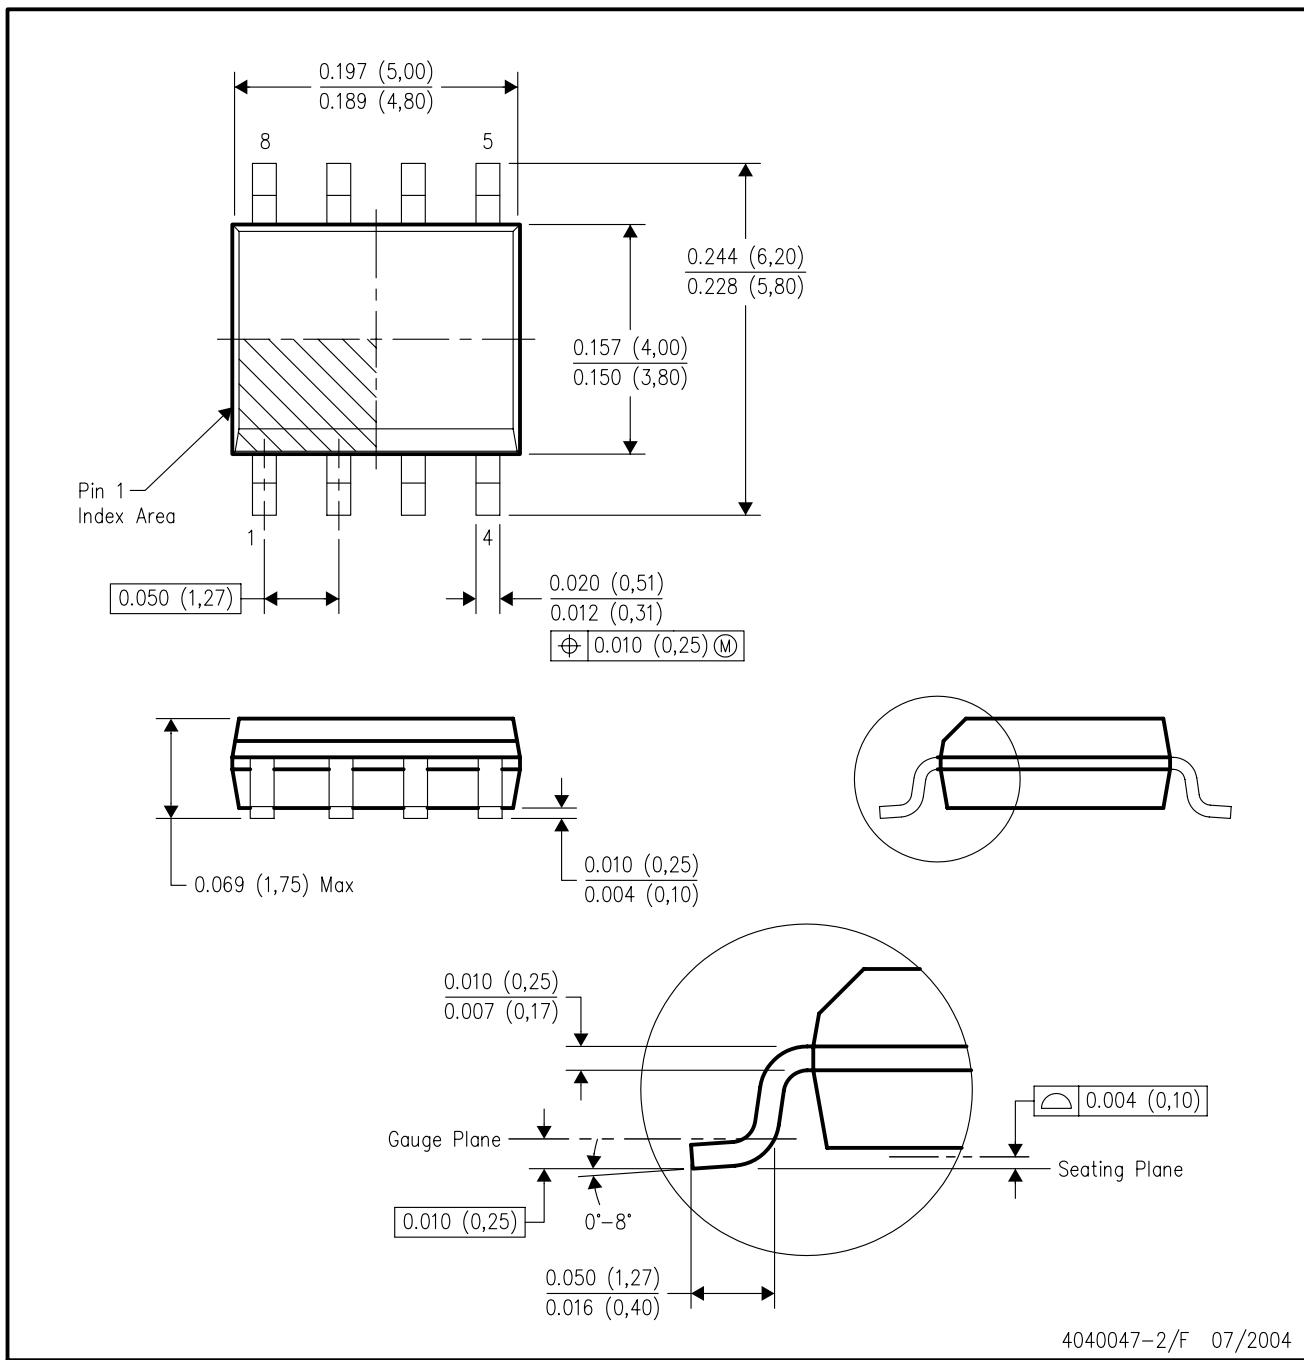


4040047-2/F 07/2004

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
  - Falls within JEDEC MS-012 variation AA.

LP (O-PBCY-W3)

PLASTIC CYLINDRICAL PACKAGE

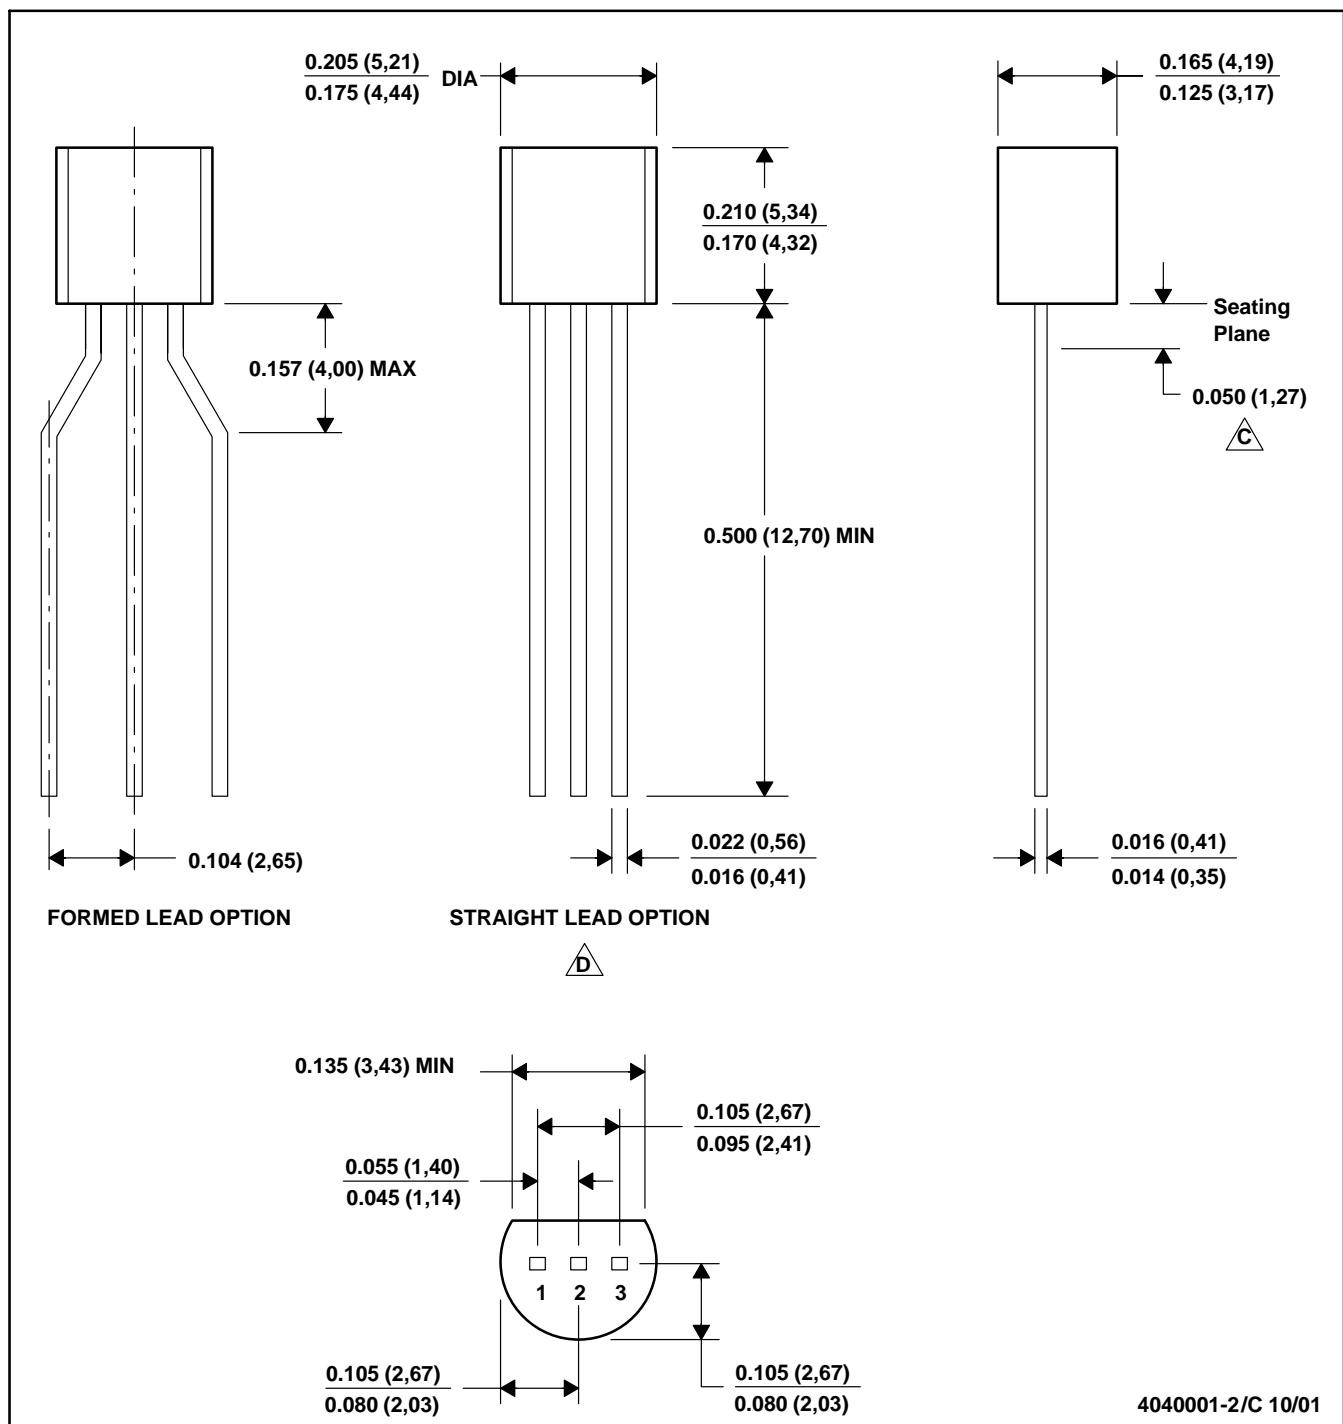

NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.

C. Lead dimensions are not controlled within this area

D. Falls within JEDEC TO -226 Variation AA (TO-226 replaces TO-92)

E. Shipping Method:

Straight lead option available in bulk pack only.


Formed lead option available in tape &amp; reel or ammo pack.

# MECHANICAL DATA

MSOT002A – OCTOBER 1994 – REVISED NOVEMBER 2001

LP (O-PBCY-W3)


PLASTIC CYLINDRICAL PACKAGE

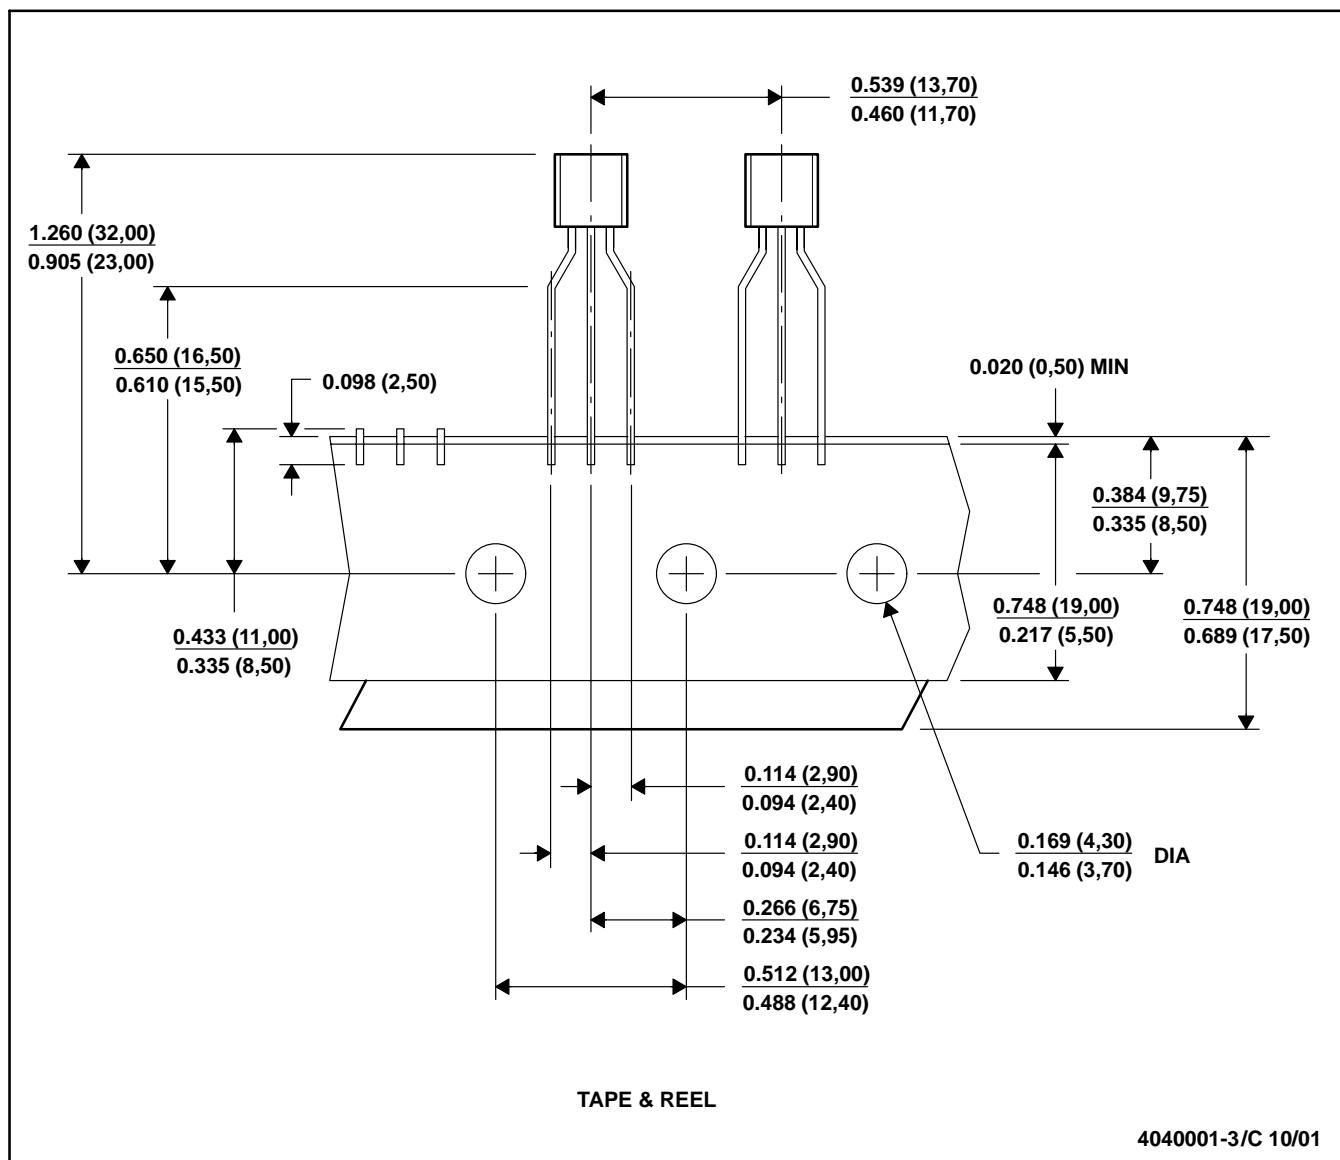

- NOTES: A. All linear dimensions are in inches (millimeters).  
B. This drawing is subject to change without notice.  
C. Tape and Reel information for the Format Lead Option package.

## KC (R-PSFM-T3)

## PLASTIC FLANGE-MOUNT PACKAGE

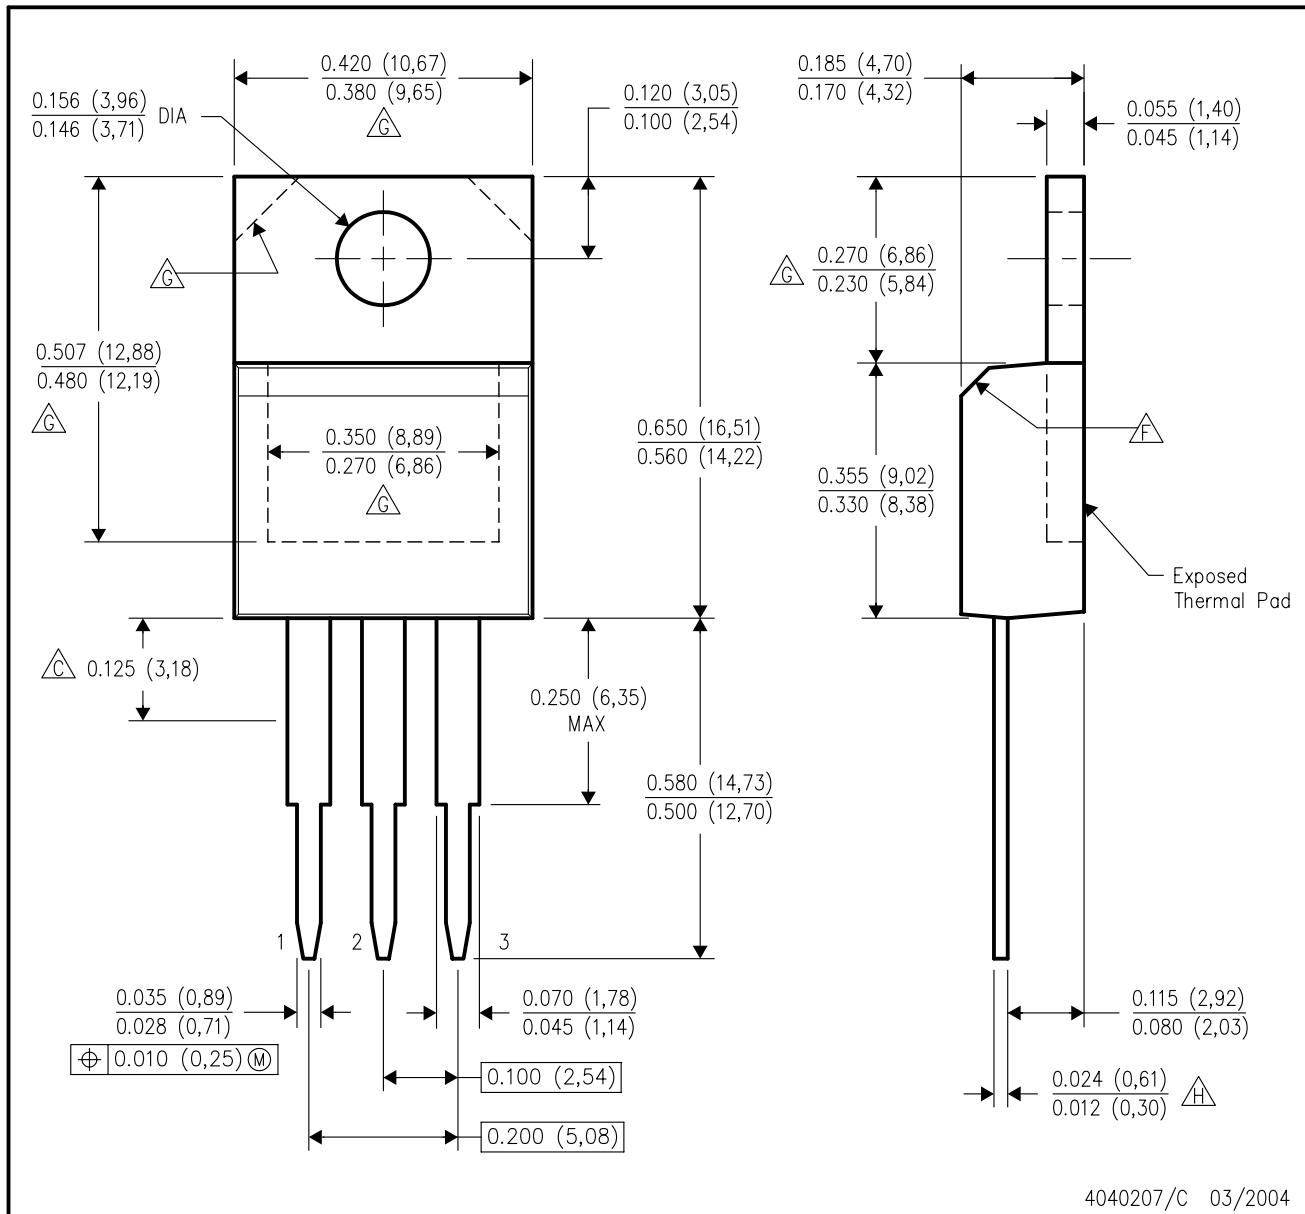

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - Lead dimensions are not controlled within this area.
  - All lead dimensions apply before solder dip.
  - The center lead is in electrical contact with the mounting tab.
  - The chamfer is optional.
  - Thermal pad contour optional within these dimensions.
  - Falls within JEDEC TO-220 variation AB, except minimum lead thickness.

## **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

<b>Products</b>		<b>Applications</b>	
Amplifiers	amplifier.ti.com	Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Data Converters	dataconverter.ti.com	Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
DSP	dsp.ti.com	Broadband	<a href="http://www.ti.com/broadband">www.ti.com/broadband</a>
Interface	interface.ti.com	Digital Control	<a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a>
Logic	logic.ti.com	Military	<a href="http://www.ti.com/military">www.ti.com/military</a>
Power Mgmt	power.ti.com	Optical Networking	<a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a>
Microcontrollers	microcontroller.ti.com	Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
		Telephony	<a href="http://www.ti.com/telephony">www.ti.com/telephony</a>
		Video & Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
		Wireless	<a href="http://www.ti.com/wireless">www.ti.com/wireless</a>

Mailing Address:    Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2004, Texas Instruments Incorporated