




## Surface Mount PCB Lithium Coin Cell Battery Retainers

### Available on Tape & Reel

#### Ideal for Wave Soldering Applications

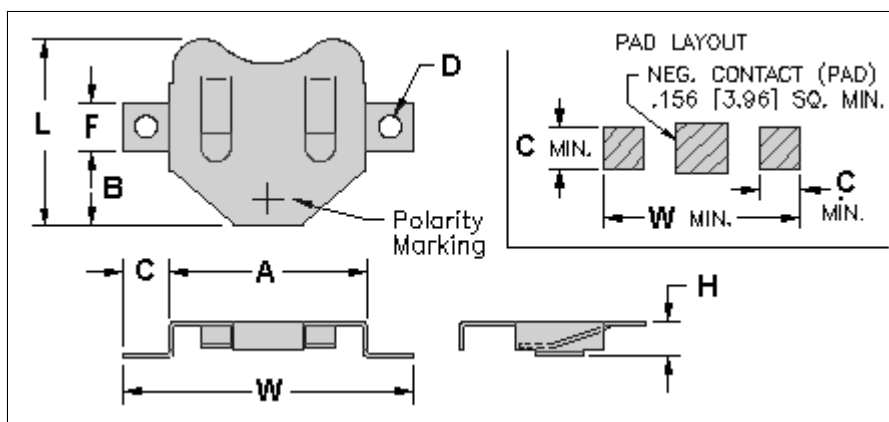

Cat No. (Bulk)	A	B	C	D	F	H	L	W	Cell Size	Tape & Reel Spec's*	Cat. No. (On tape)
2994	.202 [5.1]	.041 [1.0]	.054 [1.4]	No Hole	.100 [2.5]	.065 [1.7]	.157 [4.0]	.310 [7.9]	4.8mm	24mm Wide; 12mm Pitch; 13" Reel (1250 per Reel)	2994TR
2998	.315 [8.0]	.060 [1.5]	.053 [1.3]	.032 [.81] Rad.	.197 [5.0]	.114 [2.9]	.315 [8.0]	.421 [10.7]	6.8mm	24mm Wide; 12mm Pitch; 13" Reel (1250 per Reel)	2998TR
2996	.520 [13.2]	.203 [12.1]	.090 [2.3]	.052 [1.3]	.125 [3.2]	.235 [6.0]	.475 [12.1]	.700 [17.8]	11.6mm	32mm Wide; 16mm Pitch; 13" Reel (600 per Reel)	2996TR
3000	.520 [13.2]	.203 [12.1]	.113 [2.9]	.047 [1.2]	.125 [3.2]	.125 [3.2]	.475 [12.1]	.745 [18.9]	12mm	32mm Wide; 16mm Pitch; 13" Reel (1000 per Reel)	3000TR
3012	.664 [16.9]	.281 [7.1]	.125 [3.2]	.047 [1.2]	.125 [3.2]	.156 [4.0]	.594 [15.0]	.914 [23.2]	16mm	44mm Wide; 24mm Pitch; 13" Reel (600 per Reel)	3012TR
3002	.831 [21.1]	.317 [8.0]	.190 [4.8]	.093 [2.3]	.200 [5.1]	.156 [4.0]	.782 [19.8]	1.210 [30.7]	20mm	44mm Wide; 24mm Pitch; 13" Reel (500 per Reel)	3002TR
3026	.831 [21.1]	.317 [8.0]	.190 [4.8]	.093 [2.3]	.200 [5.1]	.085 [2.2]	.782 [19.8]	1.210 [30.7]	20mm	44mm Wide; 24mm Pitch; 13" Reel (500 per Reel)	3026TR
3020	.885 [22.5]	.433 [11.0]	.200 [5.1]	.093 [2.3]	.200 [5.1]	.156 [4.0]	.890 [22.6]	1.339 [34.0]	20mm†	56mm Wide; 32mm Pitch; 13" Reel (200 per Reel)	3020TR

										per Reel)	
3022	.939 [23.9]	.433 [11.0]	.200 [5.1]	.093 [2.3]	.200 [5.1]	.240 [6.1]	.877 [22.3]	1.339 [34.0]	20mm†	56mm Wide; 32mm Pitch; 13" Reel (200 per Reel)	3022TR
3010	.939 [23.9]	.375 [9.5]	.200 [5.1]	.093 [2.3]	.200 [5.1]	.240 [6.1]	.819 [20.1]	1.339 [34.0]	2354	56mm Wide; 32mm Pitch; 13" Reel (200 per Reel)	3010TR
3004	.939 [23.9]	.375 [9.5]	.200 [5.1]	.093 [2.3]	.200 [5.1]	.156 [4.0]	.832 [21.1]	1.339 [34.0]	23mm	56mm Wide; 32mm Pitch;	3004TR
3006	1.000 [25.4]	.406 [10.3]	.200 [5.1]	.093 [2.3]	.200 [5.1]	.156 [4.0]	.918 [23.3]	1.400 [35.6]	24mm	13" Reel (400 per Reel)	3008TR
3008	1.000 [25.4]	.406 [10.3]	.200 [5.1]	.093 [2.3]	.200 [5.1]	.230 [5.8]	.890 [22.6]	1.400 [35.6]	2450	56mm Wide; 32mm Pitch; 13" Reel (200 per Reel)	3088TR
Material: .010 [2.54] Phosphor Bronze									Finish: Tin Nickel Plate		
* All conductive polystyrene carrier tape meets ANSI/EIA - 481 standard. † 3020 & 3022 supplied with insulator to accommodate 2, 20mm dia batteries											

Battery Reference		
Cat. No.	Duracell, Eveready, Panasonic, Sony, Toshiba, Varta, Ray-O-Vac, Sanyo, Seiko	Cell Size
<b>2994</b>	SR416, ML414, 337	<b>4.8mm</b>
<b>2998</b>	MC621, V364, SC621	<b>6.8mm</b>
<b>2996</b>	SR44, LR44, 357, MS76, PX76A, G-13, 303, V313	<b>11.6mm</b>
<b>3000</b>	BR1216, CR1216, BR1220, CL1220, CR1220, BR1225	<b>12mm</b>
<b>3012</b>	BR1616, CR1612, CR1616, BR1620, CR1632	<b>16mm</b>
<b>3002</b>	BR2016, CR2016, DL2016, BR2020, CL2020, BR2025, CR2025, DL2025, DR2032, CR2032, DL2032	<b>20mm</b>
<b>3026</b>	2016	<b>20mm</b>
<b>3020</b>	(2)BR2016, (2)CR2016, (2)DL2016, (1) DR2032, (1)CR2032, (1) DL2032	<b>20mm</b>
<b>3022</b>	(2) BR2020, (2)CL2020, (2)BR2025, (2)CR2025, (2) DL2025, (1) DR2032, (1)CR2032, (1) DL2032	<b>20mm</b>
<b>3010</b>	CR2354, DL2354	<b>2354</b>
<b>3004</b>	BR2320, CL2320, CR2320, BR2325, CR2325, DL2325, BR2330, CL2330	<b>23mm</b>
<b>3006</b>	CR2430, DL2430	<b>24mm</b>
<b>3008</b>	CR2450, DL2450	<b>2450</b>

[Click to Request Samples](#)

[VIEW PRODUCT OVERVIEW](#)