




LOC	DIST	REVISIONS						
J	---	P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
		D	再作成	REDRAWN WITH CHANGE	FJ00 - 1289 - 98	11-MAY-99	Sh.8	MS
		E	変更		ECR-06-014778	22JUN2006	Y.Y	N.Y

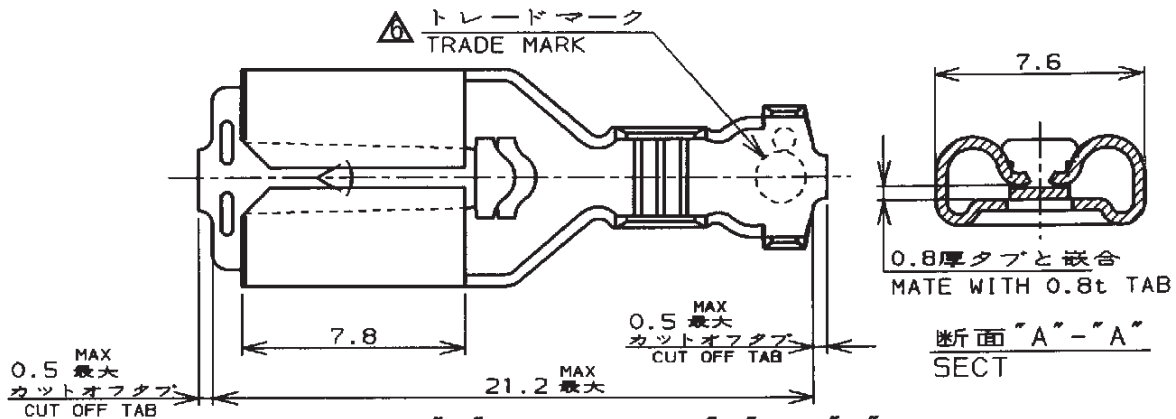

断面 "A" - "A"
SECT

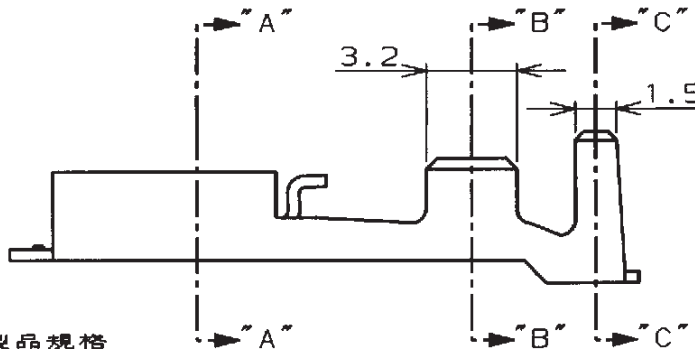

断面 "B" - "B"
SECT



断面 "C" - "C"
SECT

- 注:
1. 適用製品規格
175022-1:108-5251 , 1-175022-1:108-5251-4
 2. 取付適用規格
175022-1:114-5119 , 1-175022-1:114-5119-1
 3. 適用スリーブ型番:174817-1
 4. 本端子は連鎖状態でリール巻き
 5. 取扱い説明書: 411-5391

- △ AMP もしくは TYCO マーク
- NOTES:
1. PRODUCT SPECIFICATION
175022-1:108-5251 , 1-175022-1:108-5251-4
 2. APPLICATION SPECIFICATION
175022-1:114-5119 , 1-175022-1:114-5119-1
 3. APPLICABLE SLEEVE P/N :174817-1
 4. CONTINUOUS STRIP ON REELS
 5. INSTRUCTION SHEET NO:411-5391
- △ AMP OR TYCO MARK

DEGREASE PART 脱脂品	911590-1	---	PRE TINNED BRASS 錫メッキ付黄銅0.4t	1-175022-1
---	911590-1	175023-1	PRE TINNED BRASS 錫メッキ付黄銅0.4t	175022-1
HAND TOOL NO. 手動工具型番	L.P.NO. ばら状端子型番	MATERIAL 材料	P/N 型番	

WIRE RANGE
包合電線断面積 AWG #18-#14
0.76~2.09mm²

INSULATION DIA
被覆外径 2.2~3.4mm

MATERIAL 材料 表参照

FINISH 仕上 ---

tyco
Electronics

Tyco Electronics AMP K.K.
Kawasaki, Japan

NAME 名称 "250" SERIES POSITIVE LOCK-EX REC.
"250" シリーズポジティブロック-EXリセブタクル

SIZE A4 CAGE CODE 00779 DRAWING NO. 番号 C-175022

RESTRICTED TO ---

CUSTOMER DRAWING

SCALE 尺度 4-1 SHEET 1 OF 1 REV E

19

RELEASED FOR PUBLICATION

THIS DRAWING IS UNPUBLISHED.

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

© COPYRIGHT 19

DIMENSIONS
単位 概 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

一般公差
10mm ±0.2
30mm ±0.25
100mm ±0.3
ANGLE ±3°

