



## 4600TA Series


Tubeaxial

Ø 113x37mm

- AC fans with external rotor shaded-pole motor. Impedance protected against overloading.
- Impeller and mounting bracket of metal.
- Air exhaust over mounting bracket. Rotational direction CW looking at rotor.
- Mounting from either face using two 4.3 mm holes.
- Electrical connection via 2 leads. Stripped and tinned ends.
- UL, CSA, VDE approvals on some models, please contact application engineering.

Part Number	CFM @ 0	VAC	Hertz	Power (W)	dBA	Max Amb. Temp C	Bearing Type	Speed (RPM)	Features	Wgt. (lbs)
4600TA	87	115	50/60	18	43	50	0.94	Sintec	Leads	0.94
4606TA	87	115	50/60	18	44	80	0.94	Ball	Leads	0.94
4650TA	87	230	50/60	18	43	50	0.94	Sintec	Leads	0.94
4656TA	87	230	50/60	18	44	80	0.94	Ball	Leads	0.94

The air flow and noise level of fans without external housing depends on the installation conditions. The stated air flow and noise has been measured with an orifice 109 mm Ø at a distance of approx. 17 mm from the mounting bracket. Under exceptionally favorable mounting conditions, the air flow of fan series 4600N is achievable. The noise in the optimal operating range can only be measured for these fans in a specific application.

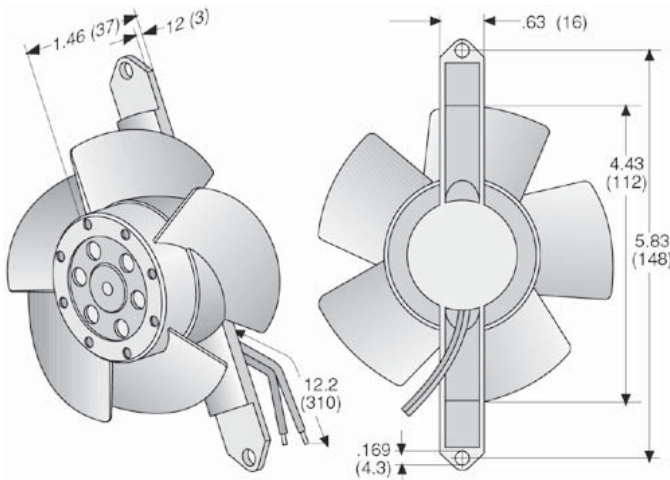

**ebm-papst**

e-mail: [sales@us.ebmpapst.com](mailto:sales@us.ebmpapst.com) · TEL: 860-674-1515 · FAX: 860-674-8536

ebm-papst Inc., 100 Hyde Road, Farmington, CT 06034 USA

ebm-papst Inc., 2004 © ebm-papst Inc. reserves the right to change any specifications or data without notice