# **High Performance LGA Cooling Solutions\***

### DIGI-KEY PART # ATS1359-ND


ATS PART # ATS-57002-C1-R0

#### **Features & Benefits**

Provides high capacity cooling for high power LGAs

Unique attachment minimizes mechanical stress on the device

Includes stand-offs with springs, screws and backing plate for direct attachment to the PCB

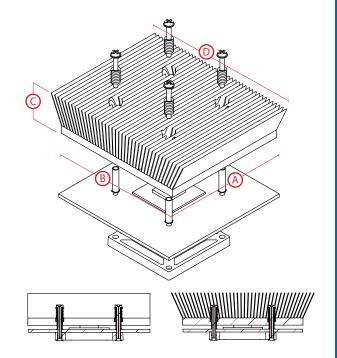

## **Thermal Performance Table**

| AIR VELOCITY |     | THERMAL RESISTANCE |               |  |
|--------------|-----|--------------------|---------------|--|
| FT/MIN       | M/S | °C/W (UNDUCTED)    | °C/W (DUCTED) |  |
| 200          | 1.0 | 1                  | 0.5           |  |
| 300          | 1.5 | 0.62               |               |  |
| 400          | 2.0 | 0.5                |               |  |
| 500          | 2.5 | 0.48               |               |  |
| 600          | 3.0 | 0.39               |               |  |
| 700          | 3.5 | 0.35               |               |  |
| 800          | 4.0 | 0.33               |               |  |

## **Product Details**<sup>†</sup>

| DIMENSION A | DIMENSION B | DIMENSION C <sup>§</sup> | DIMENSION D | TIM <sup>‡</sup> | FINISH         |
|-------------|-------------|--------------------------|-------------|------------------|----------------|
| 94          | 101         | 27                       | 49.5        | NO TIM           | BLACK-ANODIZED |

For further technical information, please contact Advanced Thermal Solutions, Inc. at **1-781-769-2800** or **www.qats.com** 

- \* RoHS Compliant
- ‡ TIM = Thermal Interface Material
- † Dimensions are measured in millimeters
- § Dimension C = the height of the heat sink shown above and does not include the height of the attachment method



