

Units: mm

4

3

2


1

500±15mm

100±10

100±10

WHITE
(W-100#)




P1


①④⑥⑦

①⑤⑥⑦

RED
(RD-35#)




P2



Mould NO. WM-009 / NM-006

WHITE
(W-100#)




P3

②④⑦

②⑤⑦



RED
(RD-35#)



P4

Mould NO. WM-010 / NM-006

PIN ASSIGNMENT:

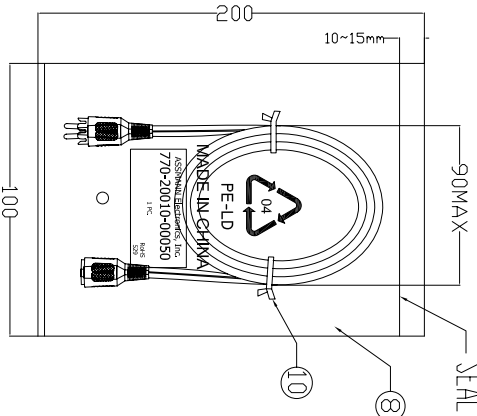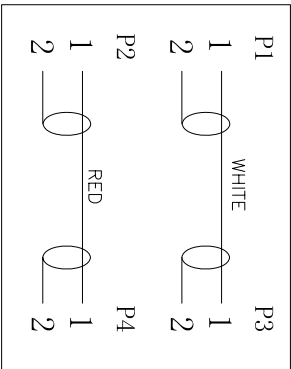


Electrical test:

- 1. 100% short, open, miswire test
- 2. Conduct resistance: 2 Ohm(max)
- 3. Insulation resistance: 5Mohm(min)
- 4. dielectric test: DC 300V

NOTE:

1. 小PE袋/大PE袋对应料号,包袋数量及时间印刷样式:



2. 外箱两个侧袋ITEM NO后面各贴一个35*22mm ROHS标签.

⑩	TIE	2	BLACK L=80mm
⑨	PE BAG	1/10	CLEAR SIZE: 230*300*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑧	PE BAG	1	CLEAR SIZE: 100*200*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑦	TUBE	4	HEAT SHRINK TUBE BLACK OD1.5*10mm
⑥	IN JACKET	3.2g	CLEAR LD-PE(Mould NO. NM-006)
⑤	OUT JACKET	6.6g	PVC-40P RED(RD-35)
④	OUT JACKET	6.6g	PVC-40P WHITE(W-100)
③	CABLE	1	NOUL (10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
②	CONN	2	RCA PLUG FEMALE NI-PLATED INSULATOR COLOR:BROWN
①	CONN	2	RCA PLUG MALE BLOSSOM TYPE NI-PLATED INSULATOR COLOR:BROWN
NO.	NAME	QTY	SPECIFICATION
4			

CNC Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	LICHENG	DRAWING NO.	V6/LJQ-094-081
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20010-00050
DECIDE BY		DATE	2012-12-28
VERSIONS / EDITION	A/0	PROJECTION	

Units:mm

4

3

2


1

1000±30mm


100±10

100±10

WHITE
(W-100#)




P1




P3

WHITE
(W-100#)



P4

RED
(RD-35#)



P2





RED
(RD-35#)

P4

Mould NO.WM-009/NM-006

Mould NO.WM-010/NM-006

PIN ASSIGNMENT:

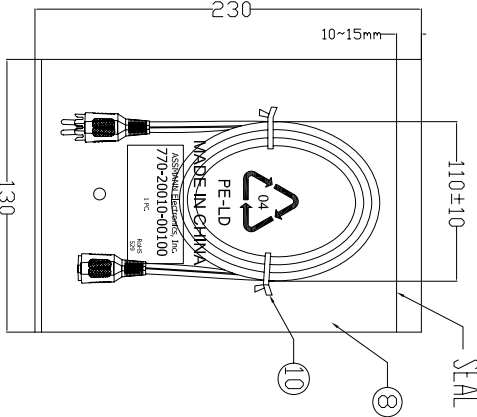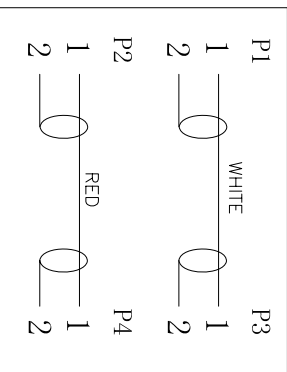

Electrical test:
1.100% short,open,miswire test
2.Conduct resistance: 2.0hm(max)
3.insulation resistance: 5Mohm(min)
4.dielectric test: DC 300V

NOTE:
1.小PE袋/大PE袋对应料号,包袋数量及时间印刷样式:



2.外箱两个侧袋ITEM NO后面各贴一个35*22mm ROHS标签.

⑩	TIE	2	BLACK L=80mm
⑨	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑧	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑦	TUBE	4	HEAT SHRINK TUBE BLACK OD1.5*10mm
⑥	IN JACKET	3.2g	CLEAR LD-PE(Mould NO.NM-006)
⑤	OUT JACKET	6.6g	PVC-40P RED(RD-35)
④	OUT JACKET	6.6g	PVC-40P WHITE(W-100)
③	CABLE	1	NOUL (10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
②	CONN	2	RCA PLUG FEMALE NI-PLATED INSULATOR COLOR:BROWN
①	CONN	2	RCA PLUG MALE BLOSSOM TYPE NI-PLATED INSULATOR COLOR:BROWN
NO.	NAME	QTY	SPECIFICATION

CNC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN BY	LICHENG	DRAWING NO.	V6/LJ0-094-081-A
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20010-00100
DECIDE BY		DATE	2012-12-28
VERSIONS /EDITION	A/0	PROJECTION	

Units:mm

4

3

2


1

1500±30mm

100±10

100±10

WHITE
(W-100#)




P1

①④⑥⑦

①⑤⑥⑦

WHITE
(W-100#)




P3

②④⑦

②⑤⑦


RED
(RD-35#)



P2





Mould NO.WM-009/NM-006



P4

RED
(RD-35#)

PIN ASSIGNMENT:

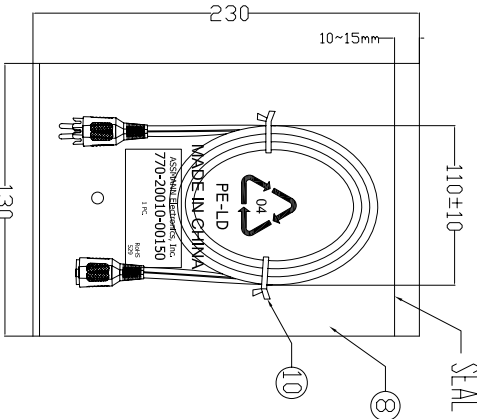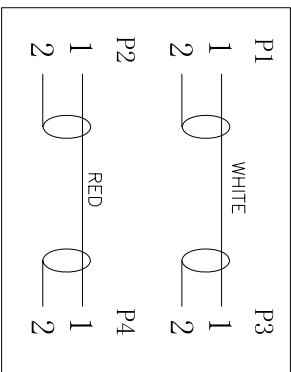


Electrical test:

- 1.100% short, open, miswire test
2. Conduct resistance: 2 Ohm(max)
3. Insulation resistance: 5Mohm(min)
4. dielectric test: DC 300V

NOTE:

1.小PE袋/大PE袋对应料号,包袋数量及时间印刷样式:



2.外箱两个侧面ITEM NO后面各贴一个35*22mm ROHS标签.

⑩	TIE	2	BLACK L=80mm
⑨	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑧	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑦	TUBE	4	HEAT SHRINK TUBE BLACK OD1.5*10mm
⑥	IN JACKET	3.2g	CLEAR LD-PE(Mould NO.NM-006)
⑤	OUT JACKET	6.6g	PVC-40P RED(RD-35)
④	OUT JACKET	6.6g	PVC-40P WHITE(W-100)
③	CABLE	1	NOUL (10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
②	CONN	2	RCA PLUG FEMALE NI-PLATED INSULATOR COLOR:BROWN
①	CONN	2	RCA PLUG MALE BLOSSOM TYPE NI-PLATED INSULATOR COLOR:BROWN
NO.	NAME	QTY	SPECIFICATION

4

3

2

1

CNC Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	LICHENG	DRAWING NO.	V6/LJ0-094-081-B
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20010-00150
DECIDE BY		DATE	2012-12-28
VERSIONS / EDITION	A/0	PROJECTION	

Units: mm

4

3

2


1

2000±30mm

100±10

100±10

WHITE
(W-100#)




P1

①④⑥⑦


①⑤⑥⑦

RED
(RD-35#)



P2

Mould NO. WM-009 / NM-006




P3

②④⑦

②⑤⑦



RED
(RD-35#)



P4

Mould NO. WM-010 / NM-006

PIN ASSIGNMENT:

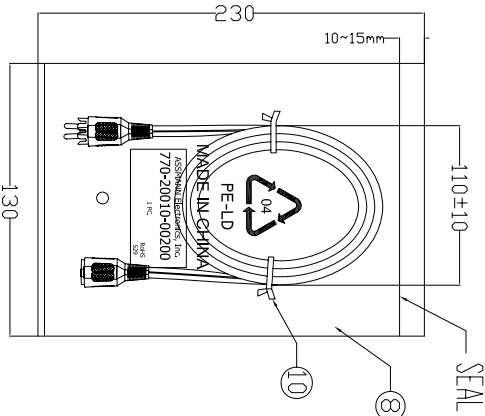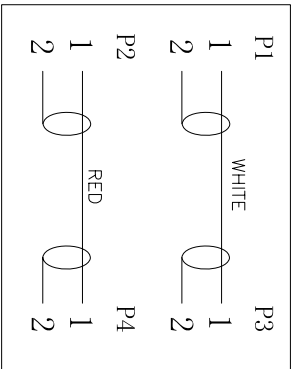

Electrical test:

- 1. 100% short, open, miswire test
- 2. Conduct resistance: 2 Ohm(max)
- 3. Insulation resistance: 5Mohm(min)
- 4. dielectric test: DC 300V

NOTE:

1. 小PE袋/大PE袋对应料号, 包袋数量及时间印刷样式:



2. 外箱两个侧面ITEM NO后面各贴一个3522mm ROHS标签。

⑩	TIE	2	BLACK L=80mm
⑨	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑧	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑦	TUBE	4	HEAT SHRINK TUBE BLACK OD1.5*10mm
⑥	IN JACKET	3.2g	CLEAR LD-PE(Mould NO. NM-006)
⑤	OUT JACKET	6.6g	PVC-40P RED(RD-35)
④	OUT JACKET	6.6g	PVC-40P WHITE(W-100)
③	CABLE	1	NOUL (10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
②	CONN	2	RCA PLUG FEMALE NI-PLATED INSULATOR COLOR:BROWN
①	CONN	2	RCA PLUG MALE BLOSSOM TYPE NI-PLATED INSULATOR COLOR:BROWN
NO.	NAME	QTY	SPECIFICATION
4			

CnC Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	LICHENG	DRAWING NO.	V6/LJQ-094-081-C
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20010-00200
DECIDE BY		DATE	2012-12-28
VERSIONS / EDITION	A/0	PROJECTION	

Units:mm

4

3

2


1

2500±30mm

100±10

100±10

WHITE
(W-100#)




P1

①④⑥⑦

①⑤⑥⑦


RED
(RD-35#)



P2

Mould NO.WM-009/NM-006

WHITE
(W-100#)




P3

②④⑦

②⑤⑦



RED
(RD-35#)



P4

Mould NO.WM-010/NM-006

PIN ASSIGNMENT:

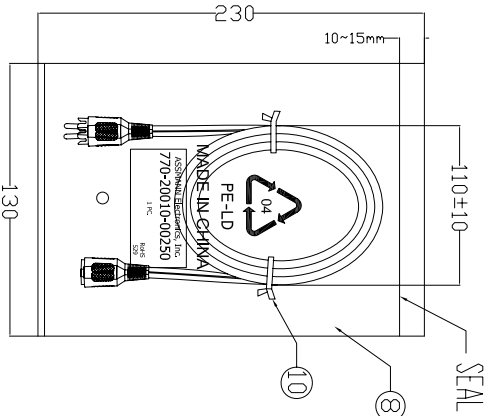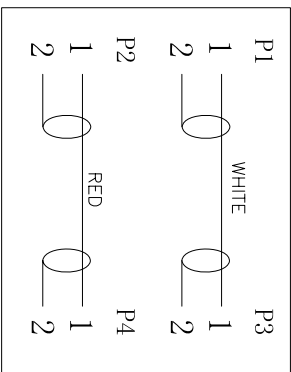

Electrical test:

- 1.100% short,open,miswire test
- 2.Conduct resistance: 2.0hm(max)
- 3.Insulation resistance: 5Mohm(min)
- 4.dielectric test: DC 300V

NOTE:

1.小PE袋/大PE袋对应料号,包袋数量及时间印刷样式:



2.外箱两个侧面ITEM NO后面各贴一个35*22mm ROHS标签。

⑩	TIE	2	BLACK L=80mm
⑨	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑧	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑦	TUBE	4	HEAT SHRINK TUBE BLACK OD1.5*10mm
⑥	IN JACKET	3.2g	CLEAR LD-PE(Mould NO.NM-006)
⑤	OUT JACKET	6.6g	PVC-40P RED(RD-35)
④	OUT JACKET	6.6g	PVC-40P WHITE(W-100)
③	CABLE	1	NOUL (10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
②	CONN	2	RCA PLUG FEMALE NI-PLATED INSULATOR COLOR:BROWN
①	CONN	2	RCA PLUG MALE BLOSSOM TYPE NI-PLATED INSULATOR COLOR:BROWN
NO.	NAME	QTY	SPECIFICATION
4			

CnC Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	LICHENG	DRAWING NO.	V6/LJQ-094-081-D
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20010-00250
DECIDE BY		DATE	2012-12-28
VERSIONS/EDITION	A/0	PROJECTION	

Units: mm

4

3

2


1

5000±50mm


100±10

100±10

WHITE
(W-100#)




P1




P3


RED
(RD-35#)




P2

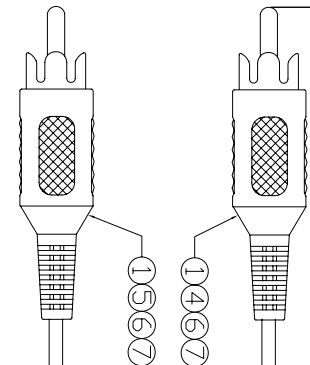

Mould NO. WM-009 / NM-006





P4



Mould NO. WM-010 / NM-006

PIN ASSIGNMENT:

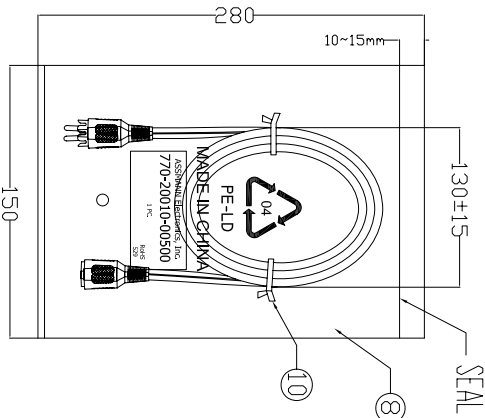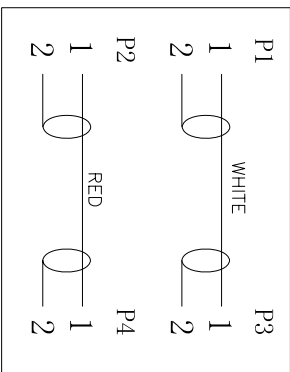

Electrical test:

- 1. 100% short, open, miswire test
- 2. Conduct resistance: 2 Ohm(max)
- 3. Insulation resistance: 5Mohm(min)
- 4. dielectric test: DC 300V

NOTE:

1. 小PE袋/大PE袋对应料号, 包袋数量及时间印刷样式:

CnC Tech, LLC	Industrial Cable and Connector Technology
770-20010-00500	770-20010-00500
5 PCS.	5 PCS.
ROHS	ROHS
529	529

2. 外箱两个侧面ITEM NO后面各贴一个35*22mm ROHS标签。

⑩	TIE	2	BLACK L=80mm
⑨	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"5PCS"
⑧	PE BAG	1	CLEAR SIZE: 150*280*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑦	TUBE	4	HEAT SHRINK TUBE BLACK OD1.5*10mm
⑥	IN JACKET	3.2g	CLEAR LD-PE(Mould NO. NM-006)
⑤	OUT JACKET	6.6g	PVC-40P RED(RD-35)
④	OUT JACKET	6.6g	PVC-40P WHITE(W-100)
③	CABLE	1	NOUL (10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
②	CONN	2	RCA PLUG FEMALE NI-PLATED INSULATOR COLOR:BROWN
①	CONN	2	RCA PLUG MALE BLOSSOM TYPE NI-PLATED INSULATOR COLOR:BROWN
NO.	NAME	QTY	SPECIFICATION
4			

CnC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN BY	LICHENG	DRAWING NO.	V6/LJ0-094-081-E
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20010-00500
DECIDE BY		DATE	2012-12-28
VERSIONS / EDITION	A/0	PROJECTION	