



SOCKETS FOR T0-5 & T0-100

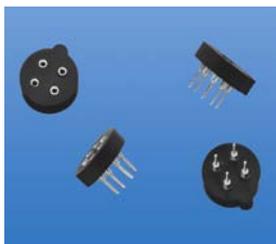


Fully molded compact construction. Speeds transistor assembly. Incorporates ultra high quality, closed entry, sleeve type contacts. Accepts .016 (.41) to .020 (.51) diameter leads or .010 (.25) x .018 (.46) rectangular transistor leads.

MATERIAL:
Insulator: Glass Filled Polyester, UL Rated 94V-0
Contact Pin: Brass, Tin-Lead Plate
RoHS (Non-RoHS Compliant)
Contact Spring: Beryllium Copper, .000030 min. Gold Plate


CAT. NO.	FOR	PINS
4590	T0-5	3
4591	T0-5	4
4592	T0-5	8
4593	T0-100	8
4594	T0-100	10




Cat. No. 4590




Cat. No. 4591




Cat. No. 4592



Cat. No. 4593



Cat. No. 4594




POWER TRANSISTOR MOUNTS

Molded barrier insulators functionally replaces up to six pieces of conventional insulation required with previous methods of mounting power transistors. Built-in barrier eliminates need for sleeving of connections.

NOTE: #6-20 mounting screw available **CAT. NO. 4706**


For T0-3 CASES

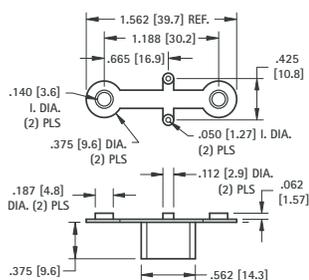

MATERIAL: Nylon 6/6, UL Rated 94V-2

CAT. NO. 4616


HEAVY DUTY T0-3

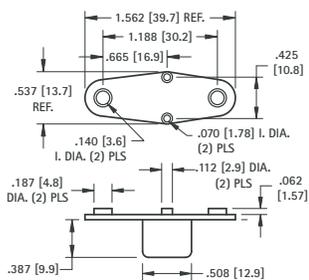

MATERIAL: Glass filled Polyester, UL Rated 94V-0

CAT. NO. 4626

For T0-66 CASES

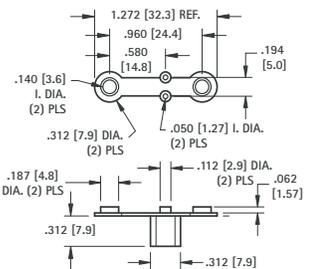

MATERIAL: Nylon 6/6, UL Rated 94V-2


CAT. NO. 4617

"MINI" HALOGEN LAMP SOCKETS


- Accepts .022 (.032) to .032 (.81) diameter Pins or Leads
- The Wire Wrap Pins can be easily bent to achieve a variety of positions

SPECIFICATIONS

Base: Glass Filled LCP; **Contact:** Beryllium Copper, Gold Plate; **Shell:** Brass, Nickel Plate



CAT. NO. 4595

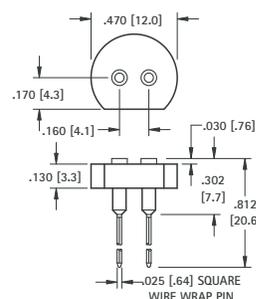


CAT. NO. 4596

T0-3 SOCKET FOR PC BOARDS



Easily assembles onto printed circuit board. Eliminates wiring. Stops on PC terminals provide sufficient spacing between socket and PC board to permit proper assembly of transistor to socket. Can be screwed down tightly to heat sink.

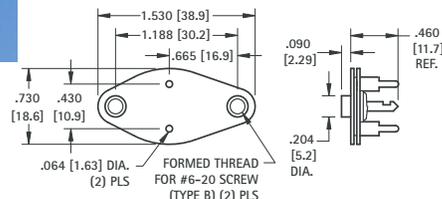


Bottom View Mounting Detail

MATERIAL:


Top Plate: Molded Nylon
Base: Phenolic
Contacts: Brass, Tin Plate
Collector Plate: Steel, Tin Plate

CAT. NO. 4600

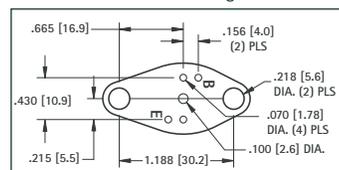

NYLON T0-3 CASE COVERS

Molded nylon covers easily mount over and insulate the power transistor. Will withstand temperatures to approximately 250°F (107°C).

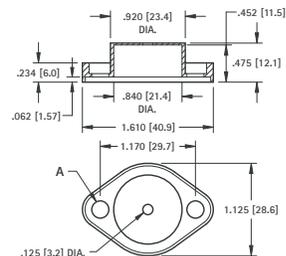

MATERIAL: Nylon 6/6, UL Rated 94V-2

CAT. NO.	FOR	EYELETS INSTALLED	A
4632	T0-3	NONE	.210 (5.4)
4634	T0-3	TWO	.140 (3.6)