


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	TLY-13	NEMA 5-15P	1	white overmold
2	30-00245	Wire, 3C, 18 AWG, UL SVT, 300V, 105C, 6.3 mm, VW-1, PVC, white	1	

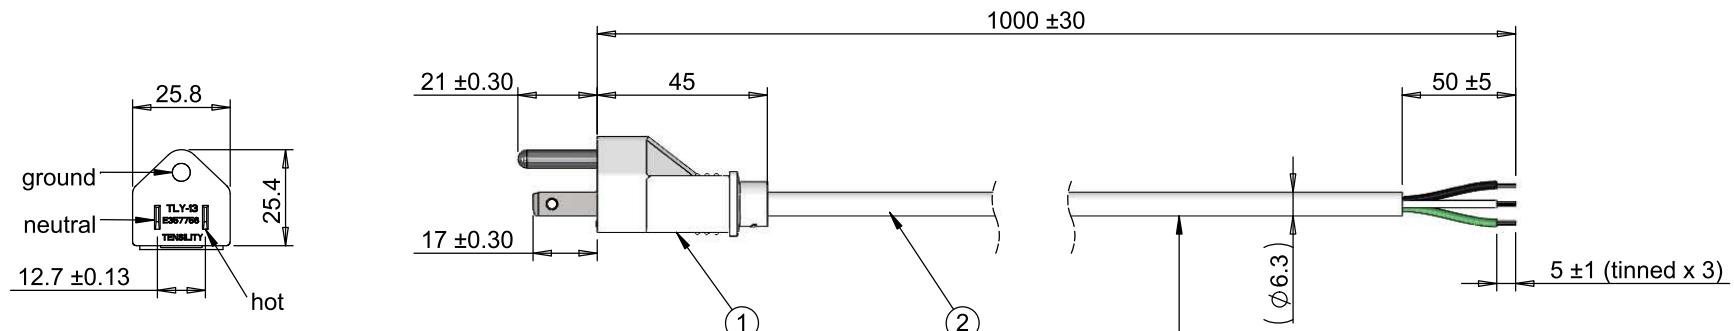

Wire marking: (UL) E339575 SVT 3X0.824mm<sup>2</sup>  
 (18AWG) 105C 300V VW-1 C(UL) SVT 3X0.824mm<sup>2</sup>  
 (18AWG) 105C 300V VW-1 TENSILITY HLE

Wiring Diagram	
TLY-13	wire color
hot	black
neutral	white
ground	green

#### Notes:

Electrical requirements: 10 A at 125 Vac as is

Revision:	Date:	Description:	Prepared: DN <small>Digitally signed by DN Date: 2017.01.26 13:56:34 -08'00'</small>	Notes: RoHS compliant  Function test: no open, no short circuit, no intermittent	TENSILITY  tel 1.541.323.3228 fax 1.541.323.4202 web tensility.com
A	12/18/2016	Initial release	Verified: PS <small>Digitally signed by PS Date: 2017.01.26 16:17:52 -08'00'</small>	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Ac cord, 1000 mm, U.S, NEMA 5-15P plug, TLY-13 to tinned, 18 AWG, SVT wire, 30-00245, white
					Size: A Part number: 11-00038
					Scale: 1:2 <input type="checkbox"/> <input checked="" type="checkbox"/> Sheet 1 of 1