


NOTES: UNLESS OTHERWISE SPECIFIED.

1. TOLERANCES TO BE ± 0.5 mm.
2. PARTS SPECIFIED AS FOLLOWS:
- 2-1. ENCLOSURE:
- * MEET MIN. V-0 FLAMMABILITY.
 - * COLOR: GE#701(BLACK)
 - * TEXTURE: EDM-2
- 2-2. AC INLET:
- * IEC 320, C8 CERTIFIED, 2 WAY.
 - * COLOR: BLACK.
- 2-3. DC OUTPUT:
- * PLUG SHAPE: TUNING FORK TYPE
 - * PLUG INSULATOR: YELLOW.
 - * PLUG POLARITY: (+)  (-)
 - * PVC WIRE: UL/ CSA, AWM 1571 VW-1, 80°C, 18AWG.
 - * COLOR: BLACK.
- 2-4. ADAPTOR UNIT:
- * DIMENSIONS MARKED * MARK MUST BE INSPECTED & CONTROLLED STRICTLY BY DQC.

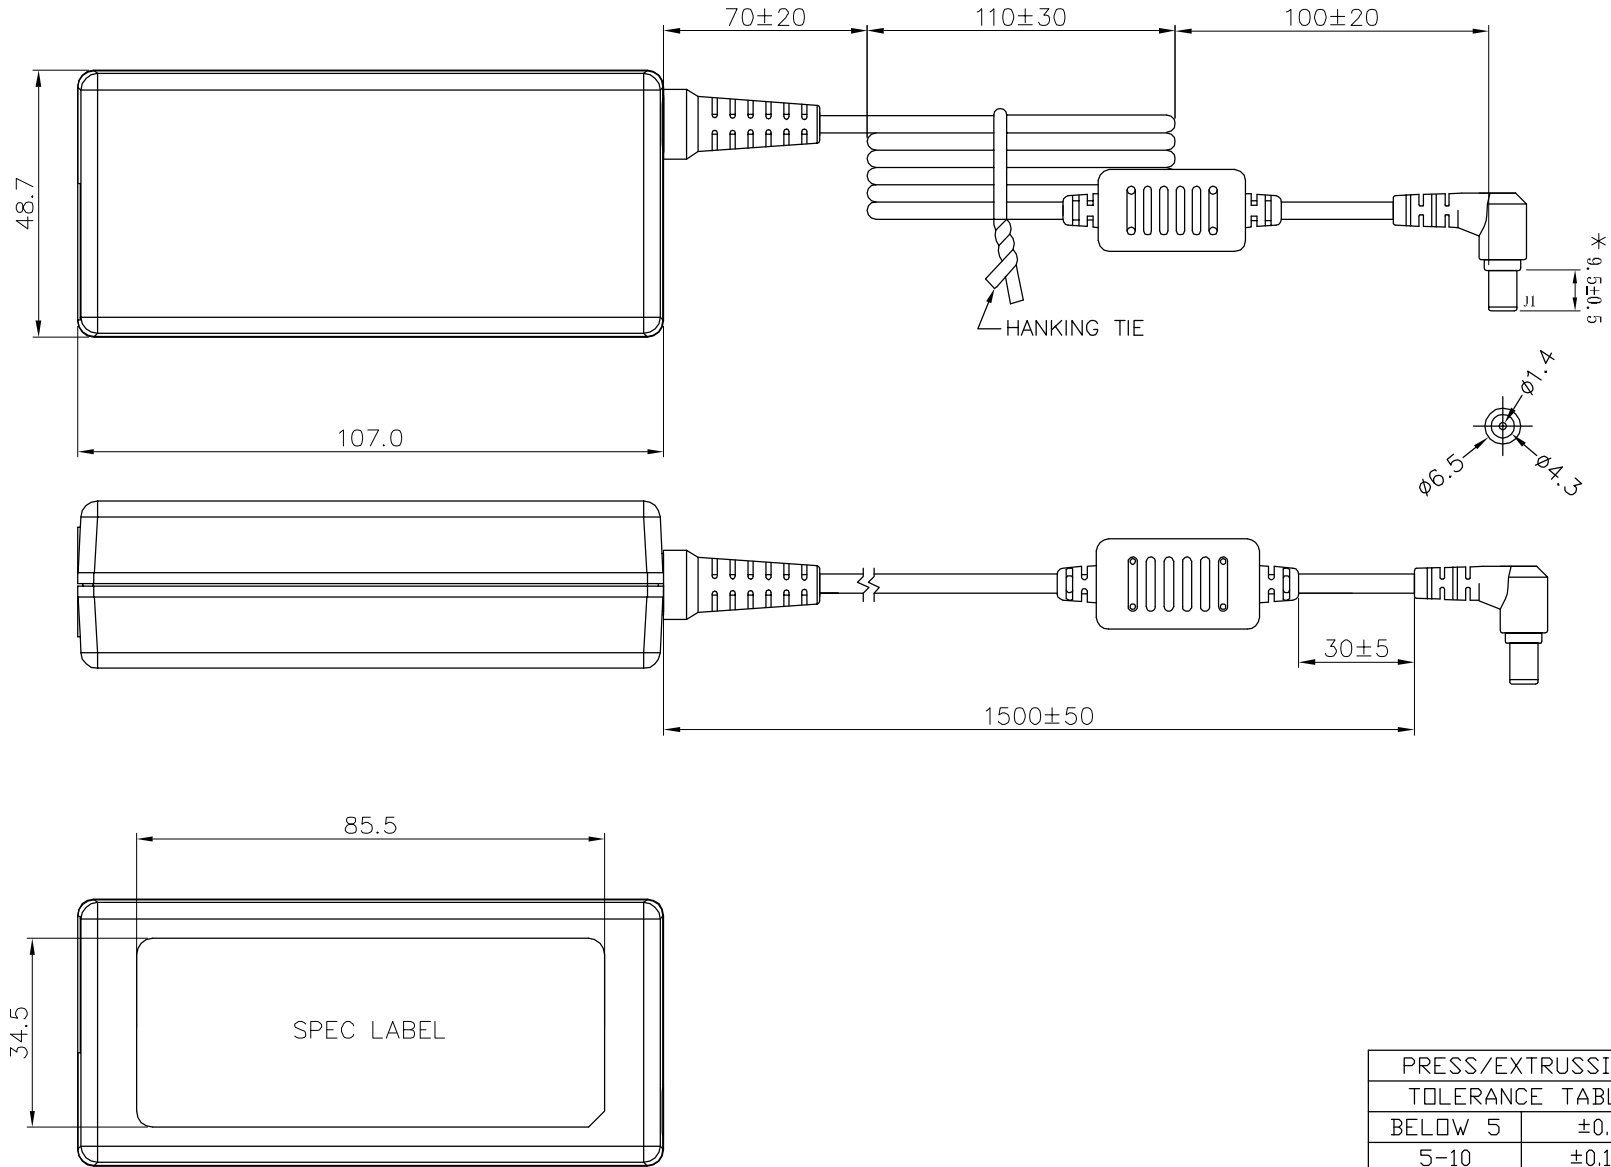

PRESS/EXTRUSION	
TOLERANCE TABLE	
BELOW 5	± 0.1
5-10	± 0.15
10-25	± 0.20
25-50	± 0.25
50-100	± 0.30
100-250	± 0.35
250-500	± 0.40