
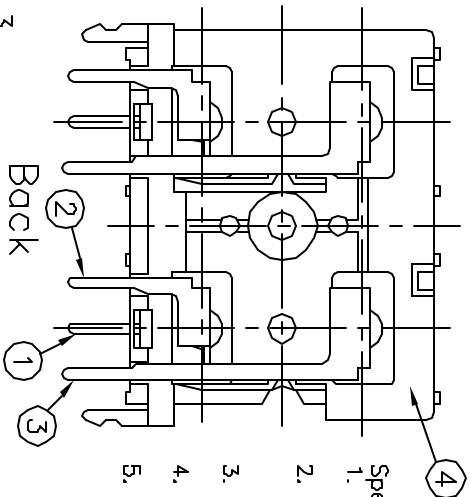
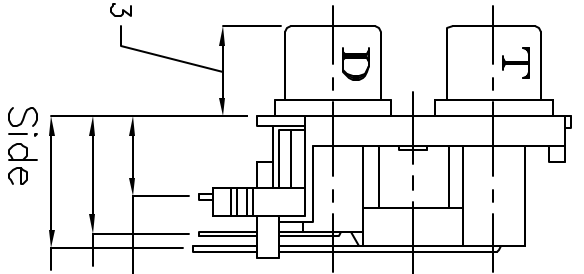


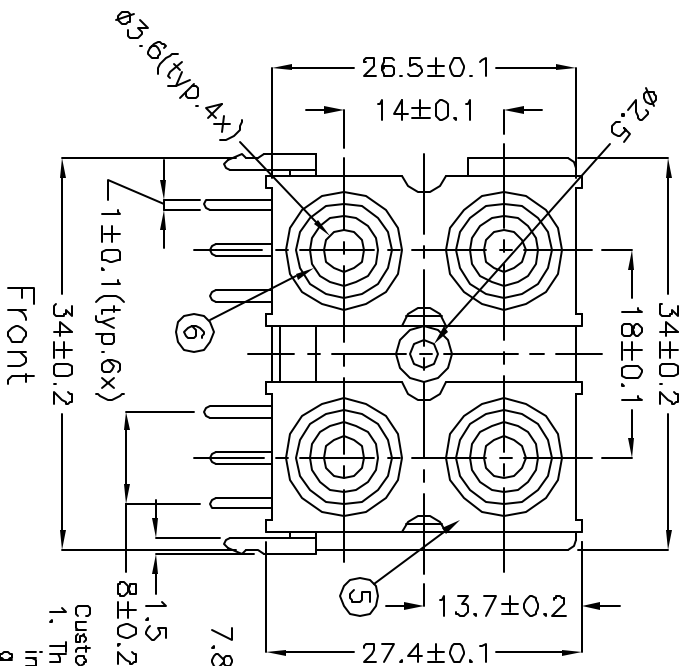



- Specifications:
- Insulation Resistance: 100MΩhms min. (Initial)
 - Contact Resistance (Initial): 30mΩhms max at 100mA(max) 1KHz.
 - Dielectric Withstand Voltage: AC 500V, 60Hz for 1 minute.
 - Insertion Force: 3Kgs max.
 - Extraction Force: 0.08Kgs min.
 - Humidity Test: 40±2, 90~95%, 48 hours.

- Custom Part Numbers:
- The last part number in the "Color Index" is a custom part template.
 - Match color number from "Color Chart" to the desired "Input" on the "Color Index."


Color Chart	
1 = Black	
2 = Red	
3 = White	
4 = Yellow	
5 = Blue	
6 = Green	

PC Board Layout
(Top View)

Color Index				
Part No.	Input X ₁	Input X ₂	Input X ₃	Input X ₄
RCJ-412211	Red	Red	Black	Black
RCJ-413344	White	White	Yellow	Yellow
RCJ-412233	Red	Red	White	White
RCJ-41X ₁ X ₂ X ₃ X ₄	Color X ₁	Color X ₂	Color X ₃	Color X ₄

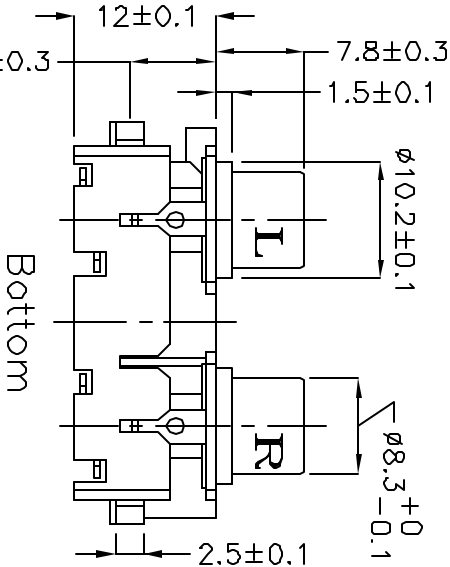

Example: (Black, Red, White, Yellow)
RCJ-41X₁X₂X₃X₄ = RCJ-411234



No.	Description	Material	Qty	Finish
6	Input	PBT	4	See Color Index
5	Cover	ABS	2	Black Color
4	Base	ABS	1	Black Color
3	Terminal T	0.5t Brass	2	Silver Plated
2	Terminal D	0.5t Brass	2	Silver Plated
1	Earth Terminal (Barrel)	0.5t Brass	2	Nickel Plated

CUI DEVICES
6405 SW Rosewood St, Suite C
Lake Oswego, OR 97035
Phone: 877-323-3576
Website: www.cuidevices.com