

MATERIALS AND FINISHES

BODY ZINC ALLOY
PLATED NICKEL

CENTER CONTACT PHOSPHOR BRONZE
PLATED GOLD

INSULATOR POLYPROPYLENE (94 V-2)


HOUSING POLYESTER BUTLYENE TEREPHTHALATE
COLOR WHITE

MOUNTING POST BRASS
PLATED TIN







SOLDER TAIL BRASS WIRE
PLATED TIN

LOCKWASHER PHOSPHOR BRONZE
PLATED NICKEL


JAM NUT BRASS
PLATED NICKEL

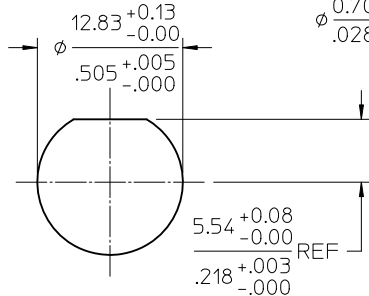



RECOMMENDED MOUNTING HOLE
PANEL THICKNESS: 5.50(.217) MAX
RECOMMENDED MOUNTING TORQUE:
0.56 N-m(5 INCH-LBS)

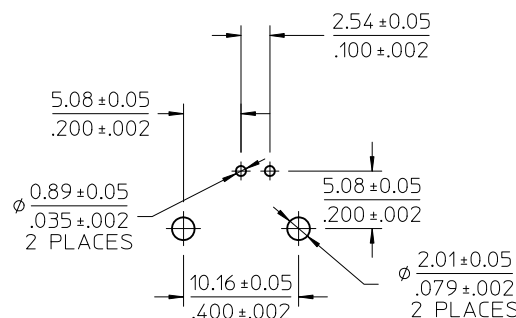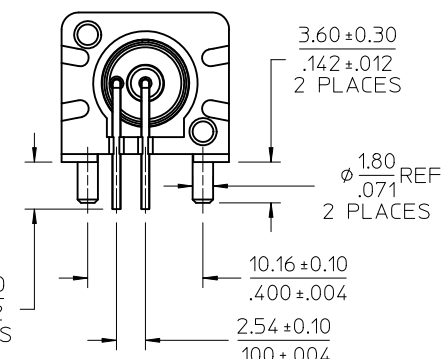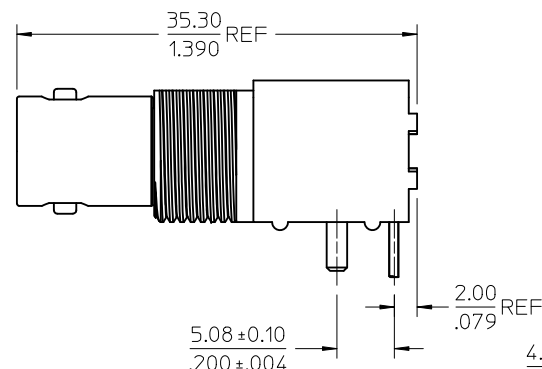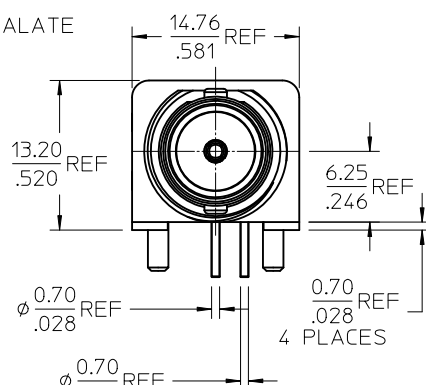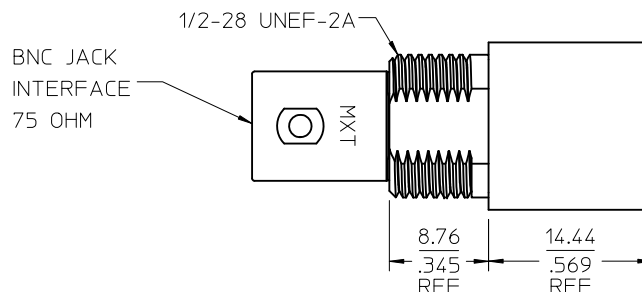


RECOMMENDED PCB LAYOUT



JAM NUT



LOCKWASHER



PS-89675-1030	ELECT / MECH
SPECIFICATION	DESCRIPTION

73171-2990	73100-0069, ONE PER BAG
73100-0069	PLASTIC TRAYS
PART NO.	PACKAGING

CHG: ADD MISSING DIMENSIONS EC NO: 2014/02/19 DRWN: JWIENER CHKD: APPR: A3	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY	DATE	TITLE BNC JACK, R/A, PCB RECEPTACLE, 75 OHMS BNC-J/RA/PCB				
			4 PLACES	± ---	± ---	CHECKED BY	DATE					
			3 PLACES	± ---	± ---	APPROVED BY	DATE					
			2 PLACES	± ---	± ---	MOLEX MOLEX INCORPORATED						
			1 PLACE	± ---	± ---						MATERIAL NO. SEE TABLE DOCUMENT NO. SD-73100-0069 SHEET NO. 1 OF 1	
			ANGULAR ± 2 °			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						