

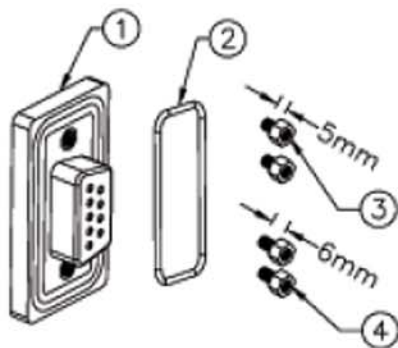




Female


Male




(09)




(15)

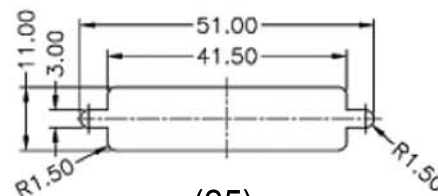


(25)



9 Pin Female Connector



15 Pin Female Connector

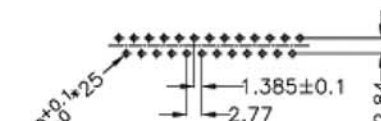

25 Pin Female Connector

Notes:

- Waterproof Rate: IP67
- Connector: Black, Nylon+GF
- Pin: Copper Alloy, Gold Plated
- Applicable Wire Range: 22AWG - 26AWG
- Insulators: PBT
- Current rating: 5A
- Dielectric voltage: 500V AC / 1 minute
- Insulation resistance: >500MΩ min.
- Operating temperature: -40°C to +105°C

Dimensions				
No. of contacts	A	B	C	D
09	39.4	16.92	16.92	16.33
15	47.8	25.25	25.25	24.66
25	64.5	38.96	38.96	38.38

RoHS
Compliant

ITEM NO

A-DFXXPP-WP-R (**FEMALE**)
A-DSXXPP-WP-R (**MALE**)

TITLE

Waterproof D-Sub Connector, Straight for PCB Assembly

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 – Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED

© Copyright 2008 by Assmann Electronic Components
All International Rights Reserved