

D-coding
Mating face
acc. to IEC 61076-2-101



Applications / Advantages

- M12 connector with the option to connect a plastic tube to protect the cable assembly in rough applications
- Robust design for IP65 / IP67 environments
- A- and D-coding available with crimp termination
- 360° shielding

Identification

Part number

Drawing


Dimensions in mm

M12 connector
with PMA connection
for PVC tube NW10



Male
4 poles, D-coding

21 03 882 1411

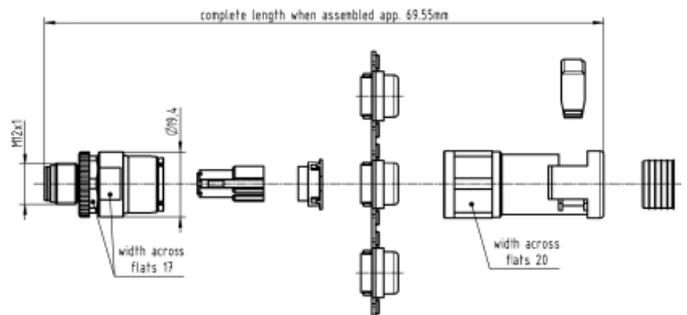

M12 connector
with PMA connection
for PVC tube NW10



Female
4 poles, D-coding

21 03 882 2411

