


LOC	DIST	REVISIONS				DATE	DWN	APVD
J	—	P	LTR	DESCRIPTION				
		O		RELEASED		26AUG2004	T.K	D.M

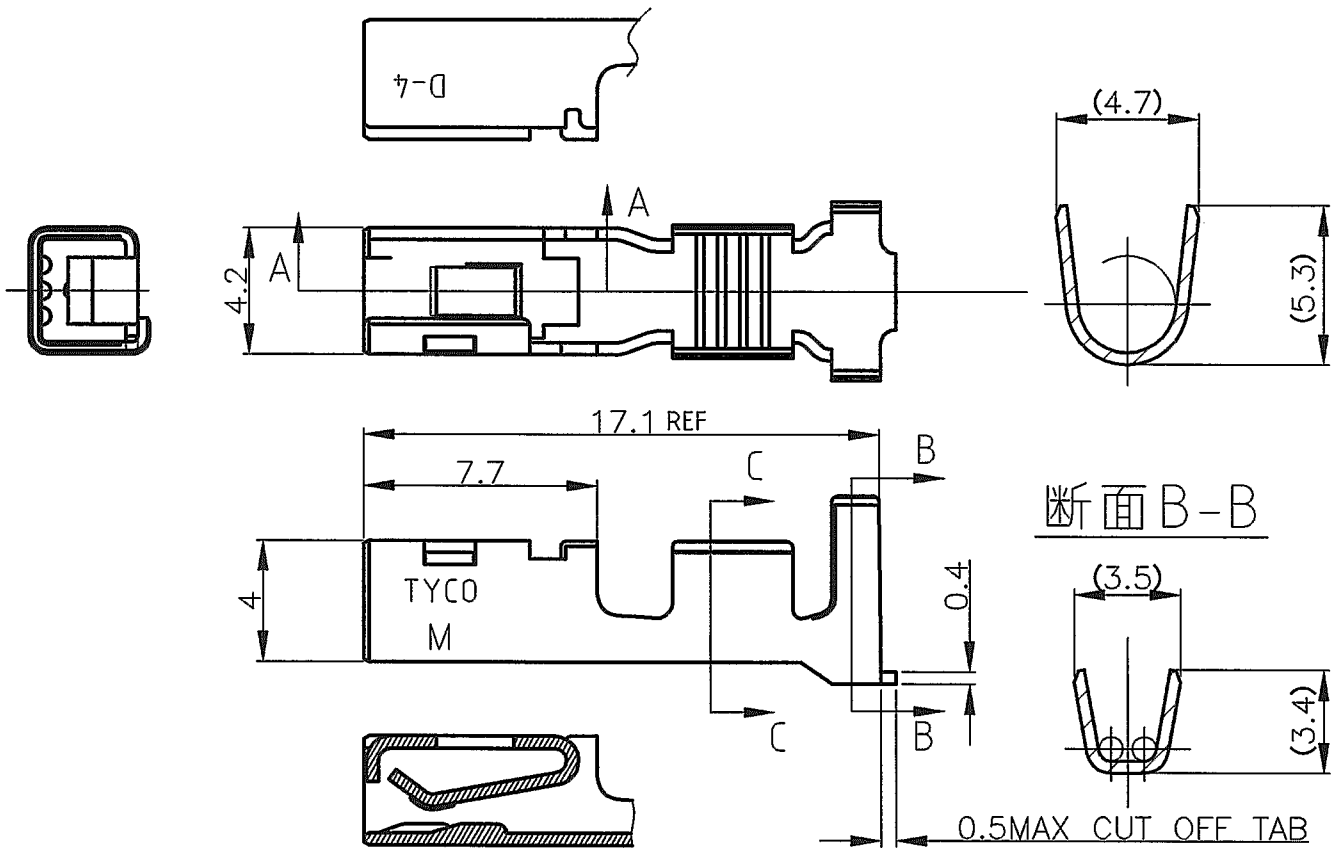

注)

1.一般公差: ± 0.25 2.材料: 銅合金全面Niめっき $1.3\mu\text{m}$ 以上接点部金めっき $0.38\mu\text{m}$ 以上めっき3.適用電線: AWG#16-#14(被覆外径 $\phi 2.0 \sim \phi 3.75$)

NOTES)

1.GENERAL TOLERANCE: ± 0.25 2.MATERIAL: COPPER ALLOY, FINISH: OVER NI PLATING $1.3\mu\text{m}$ MIN.
(CONTACT AREA) $0.38\mu\text{m}$ MIN GOLD PLATING3.APPLICABLE WIRE: AWG#16-#14 (INS DIA $\phi 2.0 \sim \phi 3.75$)

断面 A-A

断面 B-B

断面 C-C


M SIZE

1747499-2

PART NUMBER

DIMENSIONS:
単位: 特
MMTOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC	$\pm -$
1 PLC	$\pm -$
2 PLC	$\pm -$
3 PLC	$\pm -$
4 PLC	$\pm -$
ANGLES	$\pm -$



DWN T.KUDO 26AUG2004

CHK D.MITSUGI 26AUG2004

APVD D.MITSUGI 26AUG2004

PRODUCT SPEC

製品規格

108-78182

APPLICATION SPEC

取付適用規格

114-5362

WEIGHT

—

CUSTOMER DRAWING

MATERIAL
材料 COPPER ALLOYFINISH
仕上 —tyco
ElectronicsTyco Electronics AMP K.K.
Kawasaki, JapanNAME
名称DYNAMIC D-4200 REC CONTACT
M SIZE LOOSE PIECE

SIZE

CAGE CODE

DRAWING NO

番号

A4

00779

C-1747499

RESTRICTED TO

—

SCALE
尺度 4:1

SHEET 1 OF 1

REV 0