
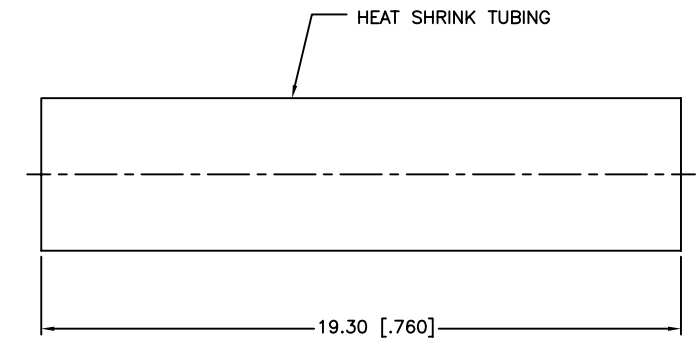


Technical drawing of a 1/4-36UNS-2B hex nut and washer assembly. The drawing shows a side view of the nut and washer, and a top view of the nut. Dimensions are given in inches and millimeters.

Dimensions:

- 17.10 [.673] REF. (Total height of nut and washer)
- 13.10 [.516] REF. (Height of nut)
- 8 [.315] HEX. (Nut size)
- 1.80 [.071] (Washer thickness)
- 9.00 [.354] (Nut width)
- 12.50 [.492] (Total width of nut and washer)
- 1.70 [.067] (Outer diameter of washer)
- 0.100 [.039] (Inner diameter of washer)
- 1/4-36UNS-2B (Thread specification)

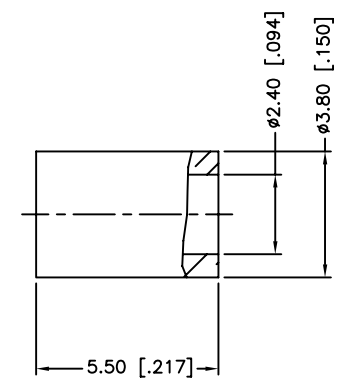

- | | | | |
|---|---------|--------|----------|
| <h1>Amphenol Connex</h1> | | | |
| PART DESCRIPTION
SMA REVERSE POLARITY R/A CRIMP PLUG
(FOR RG-178B/U,196A/U CABLE) | | | |
| PART NO. 132173RP | | | |
| DWG. NO. 132173RP.DWG | REV. NC | SIZE A | SCALE NA |